

SETTING UP THE **4037F**

Make sure to place your fountain on a firm area which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet.

1) Prepare a suitable location for your new fountain. Site should be firm and level. Set the 6037 Basin in the center of your prepared site. (The hole for the stopper is the back of the basin.)

3) Place the pump in the basin near the stopper hole. Push its power cord down through the stopper hole and pull out the back through the provided notch toward your power supply.

4) Open the slit in the Stopper and place the stopper around the pump's power cord not far from the pump itself. Then, press the stopper tightly down into the stopper hole to make a water tight seal.

5) Using the silicone sealant provided, affix the copper spill plate to the front end of the 4037 Top piece as shown. The copper plate should slightly overhang the concrete edge.

6) Thread the smaller Adapter into the top of the pump. Push the Water Tube onto the barbs of this adapter. Slip the Flow Restrictor onto the middle of the water tube, tightening it just enough to hold it in place.

7) Thread the larger Adapter up under the back of the 4037 top piece. As you carefully lower the 4037 top into the 6037 basin – push the open end of the water tube over the barbs of the larger adapter. (Some people find it easiest to place a protective sheet or burlap bag next to the basin and to place the fountain top on its side next to the basin before installing the adapter and tubing.)

8) Set the top down around the pump, tube, and power cord. Place the 7037 Cup in the basin as shown. It is designed to catch the falling water and limit splashing. Fill the basin with water.


9) Read your pump and light instructions. Fill the bottom bowl with water. Then plug in the pump to enjoy your fountain. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start.

3/2019

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact : www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

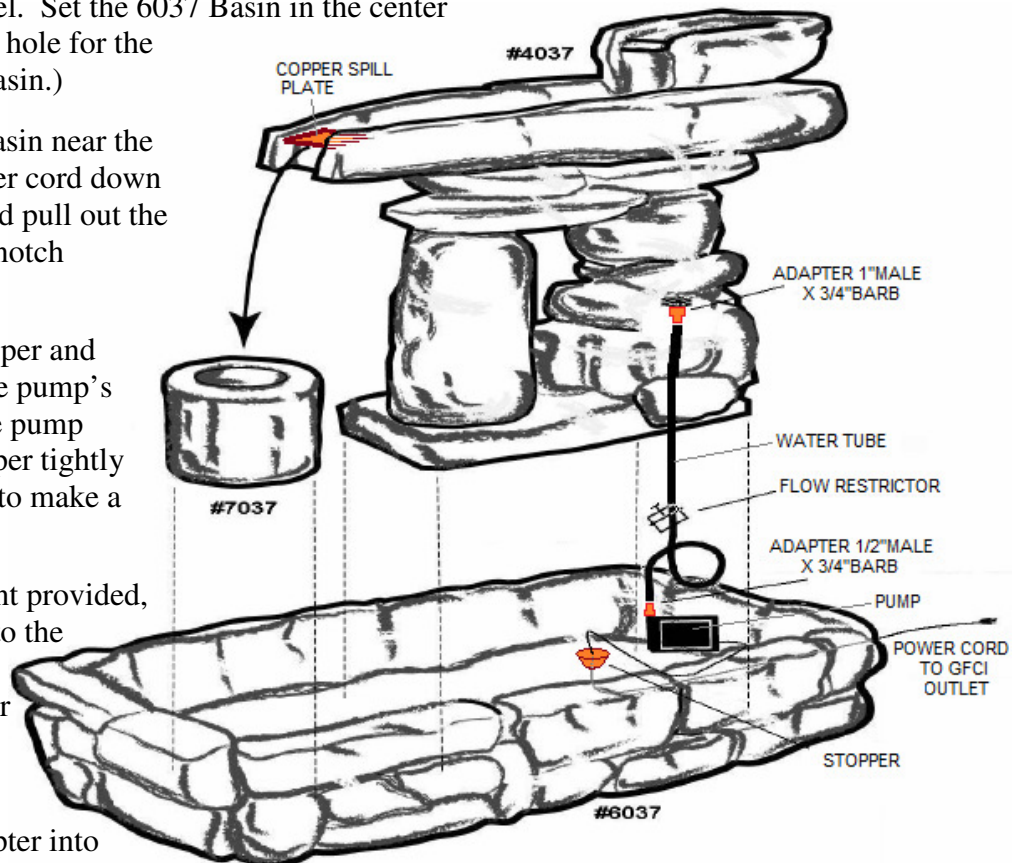

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.