


Grotto Fountain (4042F2)

- 1) Install lights in their respective locations in the 4042, and run light cables down their respective channels into the basin.
- 2) Screw hose adapters in the bottom of the 4042, running the light cables through the slots in the adapters at the same time.
- 3) Attach the light cables to the splitter. Attach the extension cable to the splitter. Drape the light cables and splitter outside the basin, over the notch in the back side of the basin.
- 4) Install plumbing exactly as outlined in the diagram, paying special attention to the "T" adapter orientation. Be sure to install the restrictor clamps over their respective hoses before pressing the hoses onto the adapters.
- 5) Drape pump cable over outside of basin, over the notch in the back side of the basin.
- 6) Fill and run the fountain. Use the restrictor clamps to reduce/balance flow as necessary.

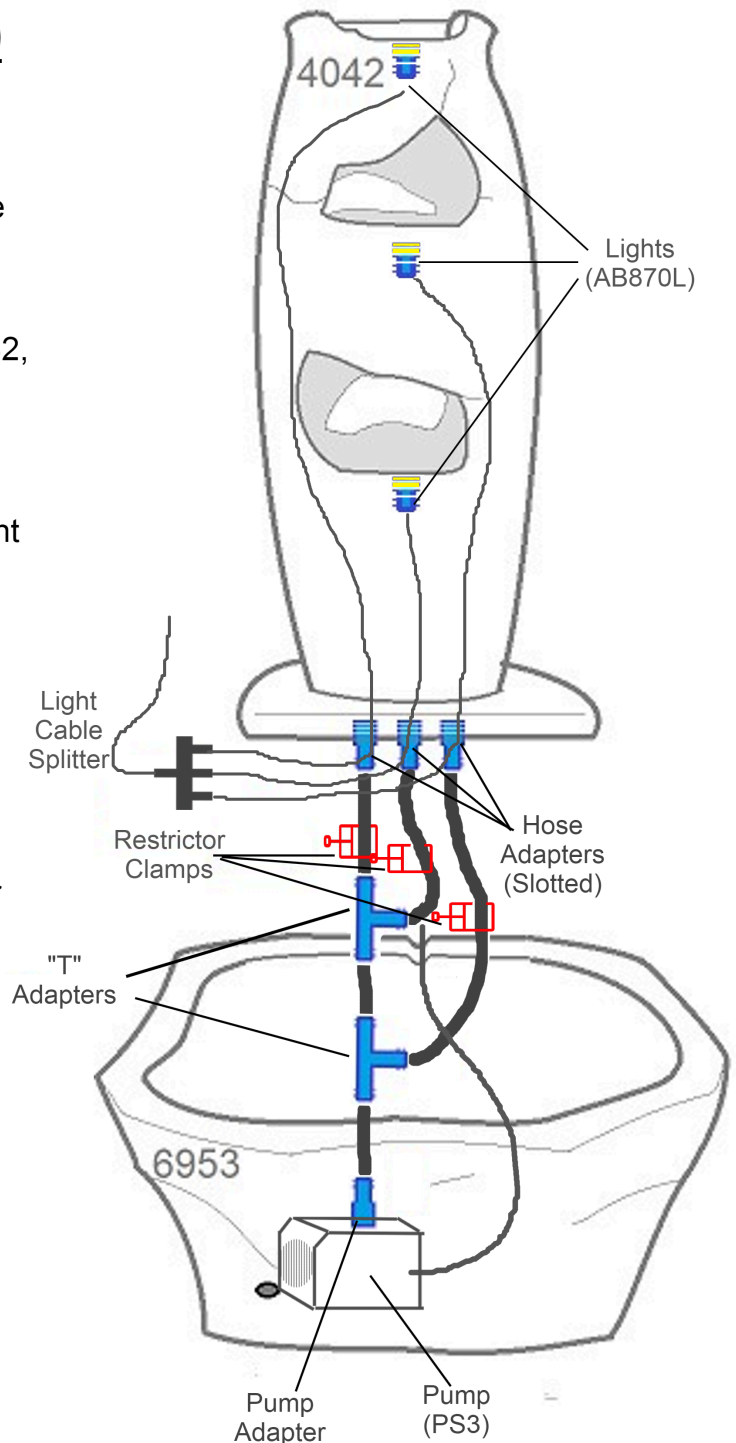

Questions? Email
ProductSupport@HenriStudio.com

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.