


Cloud Spill Fountain (4043F1)

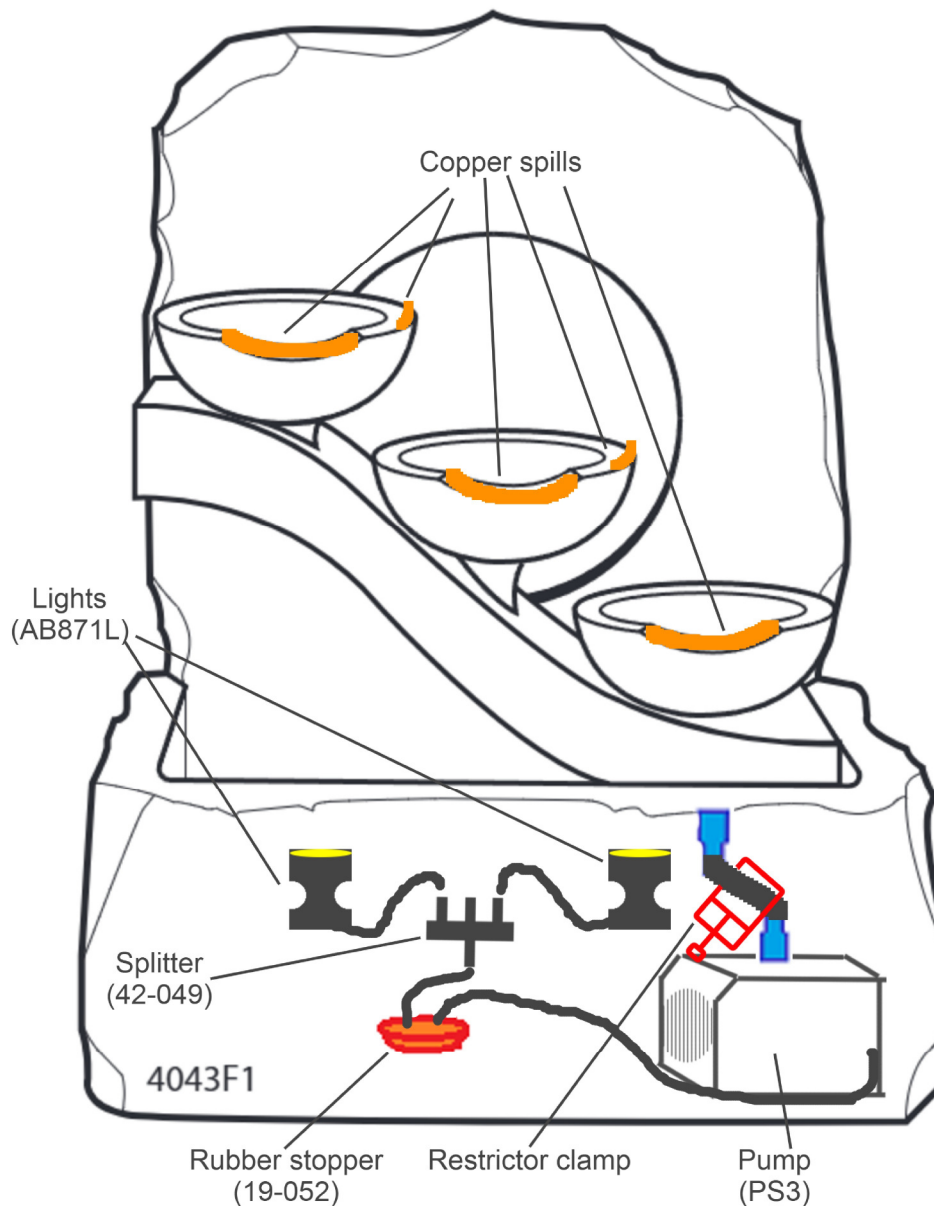

1) Place pump and light units into the basin. Connect the light cables to any two of the connection points on the splitter. Leave the unused connection point capped. Connect the light extension cable to the other side of the splitter (see diagram). Run the pump cable and the light extension cable through the hole in the bottom of the 4043 basin, bringing the cables out and underneath the fountain.

2) Screw the included adapters into the top of the pump and the threaded hole in the fountain basin, respectively. Press one end of the included tubing onto the barbed adapter on the pump. Slide the restrictor clamp over the open end of tubing. Press the open end of tubing onto the adapter affixed to the concrete.

3) In the basin, peel the rubber stopper open and wrap it around the pump and light cables passing through the hole in the basin. Each cable has a respective channel in the stopper for their respective sizes. Ensure each cable is seated well within its channel, straight up and down with no gaps in the stopper. Press the stopper into place within the hole, so that no more than 1/4" of the stopper is left protruding above the concrete.

4) Install copper spills. Lay down a single, continuous bead of silicone over the entire concrete surface of the spill area. Press the copper plate onto the silicone, wiping away any excess silicone that gets pressed out of the gap. Due to the curved nature of the spill area, the copper may need to be held into place until the silicone cures to preserve the curved shape.

Questions? Email
ProductSupport@HenriStudio.com

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.