


# Acorn Bubbler (4275F2)

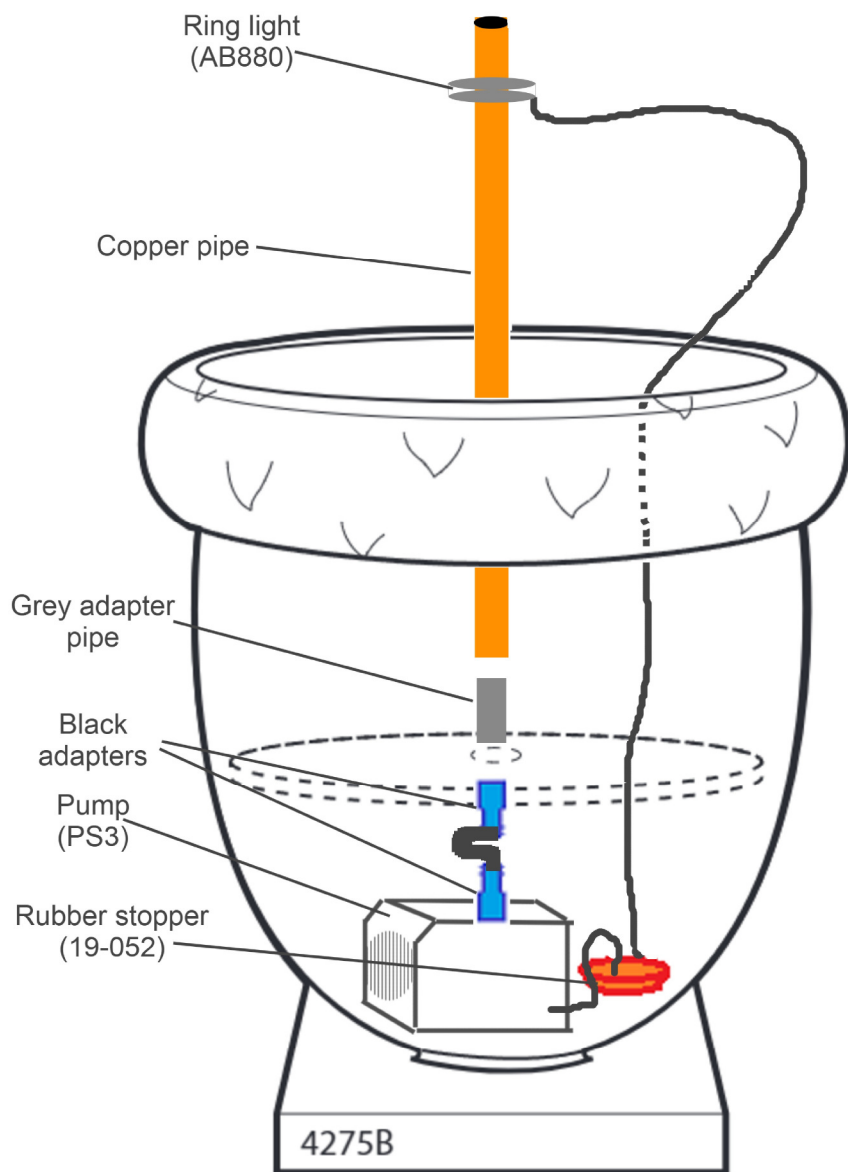

1) Place the pump into the basin. Run the pump's power cable through the hole in the bottom of the basin, out and underneath the fountain.

2) Screw the black barbed adapters on to the top of the pump, and to the bottom of the threaded hole in the center of the 4275A concrete plate. The dotted line in the diagram denotes the final position of the plate once installed.

3) Screw the grey adapter/pipe into the top of the 4275A concrete plate. Slide the copper pipe over the clear pipe.

4) Slide the ring light down the copper pipe. Run the cable for the ring light through the hole in the bottom of the basin, out and underneath the fountain.

5) In the basin, peel the rubber stopper open and wrap it around the pump and light cables passing through the hole in the basin. Each cable has a respective channel in the stopper for their respective sizes. Ensure each cable is seated well within its channel, straight up and down with no gaps in the stopper. Press the stopper into place within the hole, so that no more than 1/4" of the stopper is left protruding above the concrete.

6) Press one end of the included black tubing onto the adapter affixed to the top of the pump. Press the other end of the tubing onto the adapter affixed to the bottom of the concrete plate.

Questions? Email  
[ProductSupport@HenriStudio.com](mailto:ProductSupport@HenriStudio.com)

## **IMPORTANT – WINTER CARE**

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- \* Disconnect power to pumps and lights.
- \* Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- \* Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- \* Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

**Caution:** The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

**Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.**