


La Roma 4360F3

1. Drop the light cable down through the opening in the top of the 4360A and run the cable through the bottom, into the basin, and out through the hole in the bottom of the basin. Place the pump in the basin and run the cable through the hole in the bottom. Peel open the rubber stopper and place each cable within their respective channels in the stopper. Press the stopper firmly into the hole to create a seal.

2. Install the included barbed adapters. Screw one onto the top of the pump, the other onto the bottom of the 4360A. Press each end of tubing onto each barbed adapter.

3. Install the copper plates. Place a dab of silicone caulk onto the bottom of each of the spill plate cutouts in the concrete. Press the plate onto the silicone, ensuring about 1/4" of copper is hanging over beyond the concrete on the spilling side.

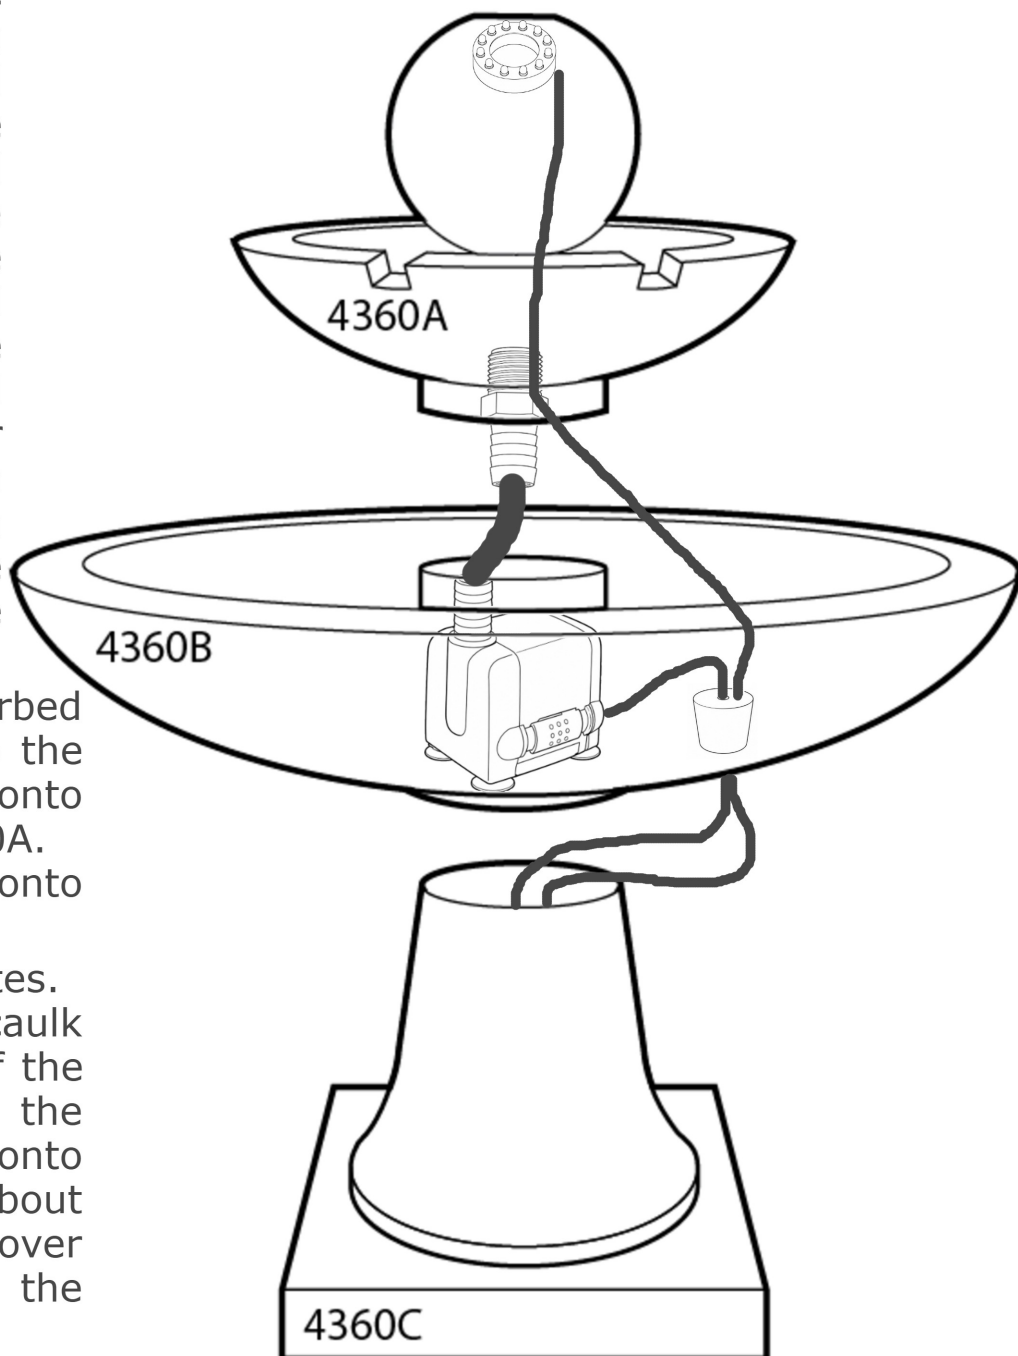

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Questions? Email
ProductSupport@HenriStudio.com

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.