


SETTING UP THE 4425F3

Make sure to place your fountain on a firm area which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Position your 4425C fountain Basin on your prepared site. Notice that the power cords will exit the back right side.

2) Use the supplied silicone sealant to attach the three spill plates as shown. A wide plate belongs to the 4425B Bowl and a wide and a narrow plate go onto the 4425A Bowl. Make sure to run the sealant in a steady line all the way across the spill area, even into the corners to keep water from running around the plate. It is recommended that the plates overhang by about 1/4" for best water pouring.

3) Set the pump in the 4425C reservoir and run its power cord out the back opening as shown. Thread the Small Barbed Adapter into the pump and push one end of the Water Tube onto the adapter. Set the 4425B bowl on the lower platform with the spill plate aimed toward the middle of the 4425C's bowl. Thread the Large Barbed Adapter underneath the 4425A Bowl, then set that bowl onto the upper platform, pushing the water tube onto the barbed adapter as you lower the bowl.

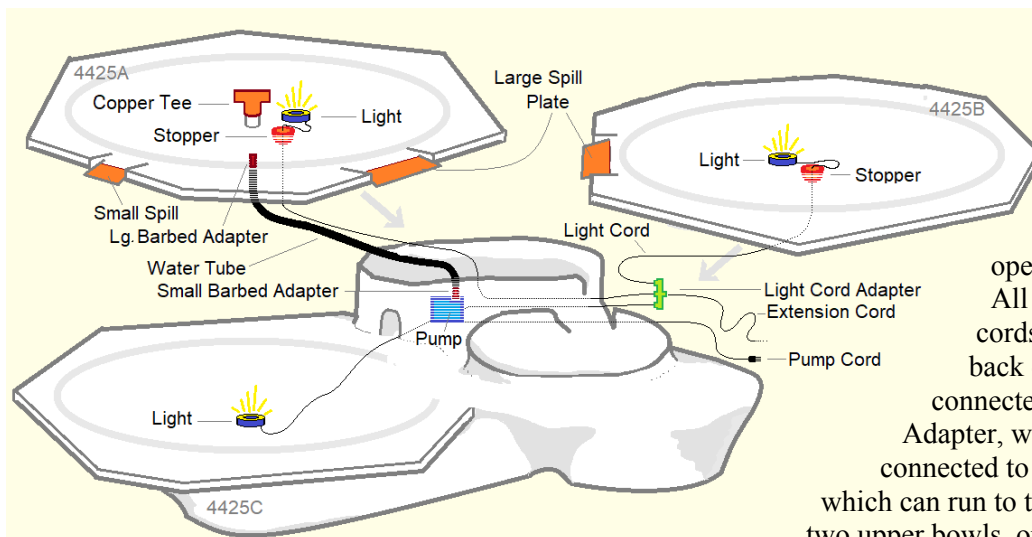

4) Place a light ring in each of the bowls, running the power cord down through the hole in the bowl or through the access opening to the reservoir. All three of the light cords can be pulled out the back of the fountain and connected to the Light Cord Adapter, which in turn is connected to the Extension Cord which can run to the transformer. In the two upper bowls, open the slit in one of

the supplied stoppers, place the power cord (near the light) into the stopper's molded groove, then close and press firmly into the hole. Leave about 1/8" of the stopper visible above the bowl floor for later removal if needed.

5) Set tee onto the pipe opening cast into the middle of the 4425A bowl. This will smooth the water flow.

6) Fill bowls and basin with water. Read pump and light instructions. Turn on the pump and lights. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start.

Csd 12/2020

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact: www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.