

# SETTING UP THE 4510F

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Set the bottom Base on your prepared site. Make sure it sits stable and level. (A notched opening at the bottom edge will indicate where the power cord will exit toward your power supply.)

2) Place the Basin on top of the base. Set pump in center of bowl and run its power cord down through the hole. With help tipping the fountain back, pull the power cord out from underneath and toward the power supply.

3) At floor level in the basin, open the slit in the Rubber Stopper. Place the power cord in the stopper's molded groove and close the slit. The press the stopper into the Basin's hole until only 1/8" remains above the floor of the Basin. This should make the basin water tight.

4) Insert the short Exhaust Fitting into the top of the pump (if it is not already there). Push one end of the Water Tube onto the exhaust fitting. Place the Flow Restrictor


in the middle of the water tube, tightening just enough to hold in place. (The restrictor can be tightened after you start the pump, if you want to reduce the amount of flowing water.)

5) As you place the Pump Cover down into the basin, feed the water tube (including the restrictor) up through the pump cover's center hole.

6) Place the Statue on the pump cover, pushing the open end of the water tube onto the pipe under the statue as you set it down.

7) Thread the Brass Umbrella Rod, with fittings and umbrella as illustrated.

8) Fill with water. Read pump instructions. Turn on the pump. If it does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start. Csd 8/2023

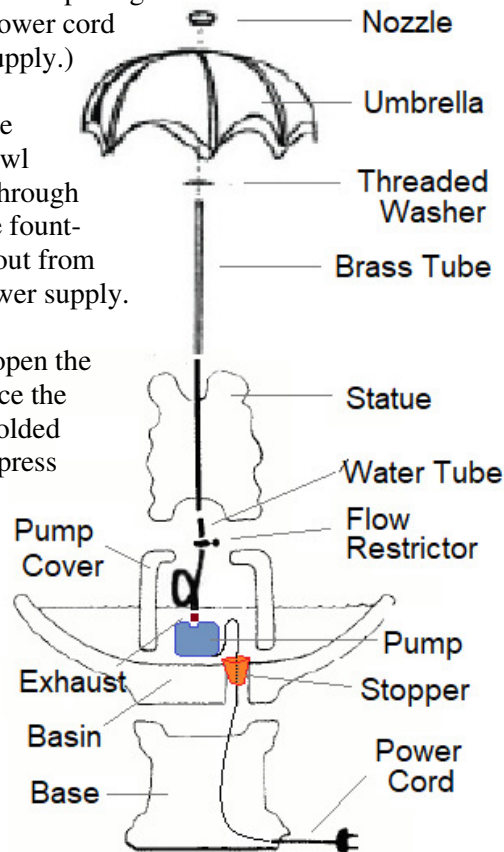

**Online Resources**  
Products: [www.henristudio.com/products](http://www.henristudio.com/products)  
FAQs: [www.henristudio.com/faq](http://www.henristudio.com/faq)  
Warranty: [www.henristudio.com/warranty](http://www.henristudio.com/warranty)  
Contact: [www.henristudio.com/contact-us](http://www.henristudio.com/contact-us)

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

## IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- \* Disconnect power to pumps and lights.
- \* Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- \* Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- \* Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.