

SETTING UP THE 4887F2

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

**** Since fountains are built from the ground up, go down this page to find set-up bulletin #1 and then work you way up the page as your fountain is built.**

6. Fill fountain with water. Read pump and light instructions. Turn on pump and light. If the pump does not start immediately it may have an "air-lock" within the impeller chamber. Simply unplug and plug in a few times and it should start.



5. Place the pump assembly in the back of the Basin and let the power cord exit over the notch with the light cord. With help, gently place the 4487A Top on the Basin, tip back, and push the open end of the water tube over the adapter under the 4487A.

4. Thread the large adapter underneath the 4887A Top.

3. Thread the Small Adapter into the pump and push the Water Tube onto the adapter.

2. Place Light inside front of Basin. Run its power cord through the center hole and up the back of the basin, over the notched cord exit.

→ 1. Set 4887B Basin on your prepared site.

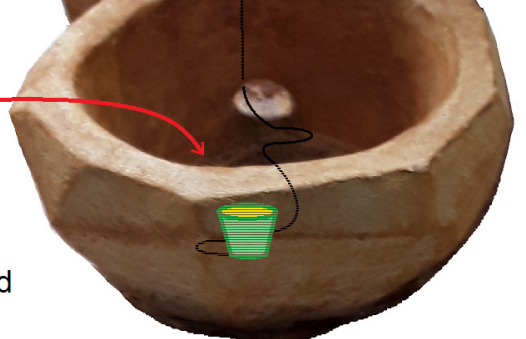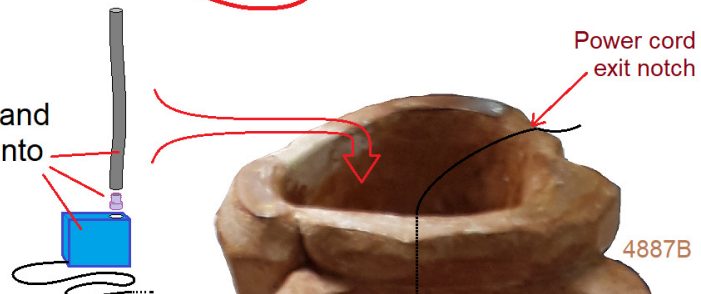

Csd

10/2023

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact : www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.