


Zen Plates Fountain (4898F2)

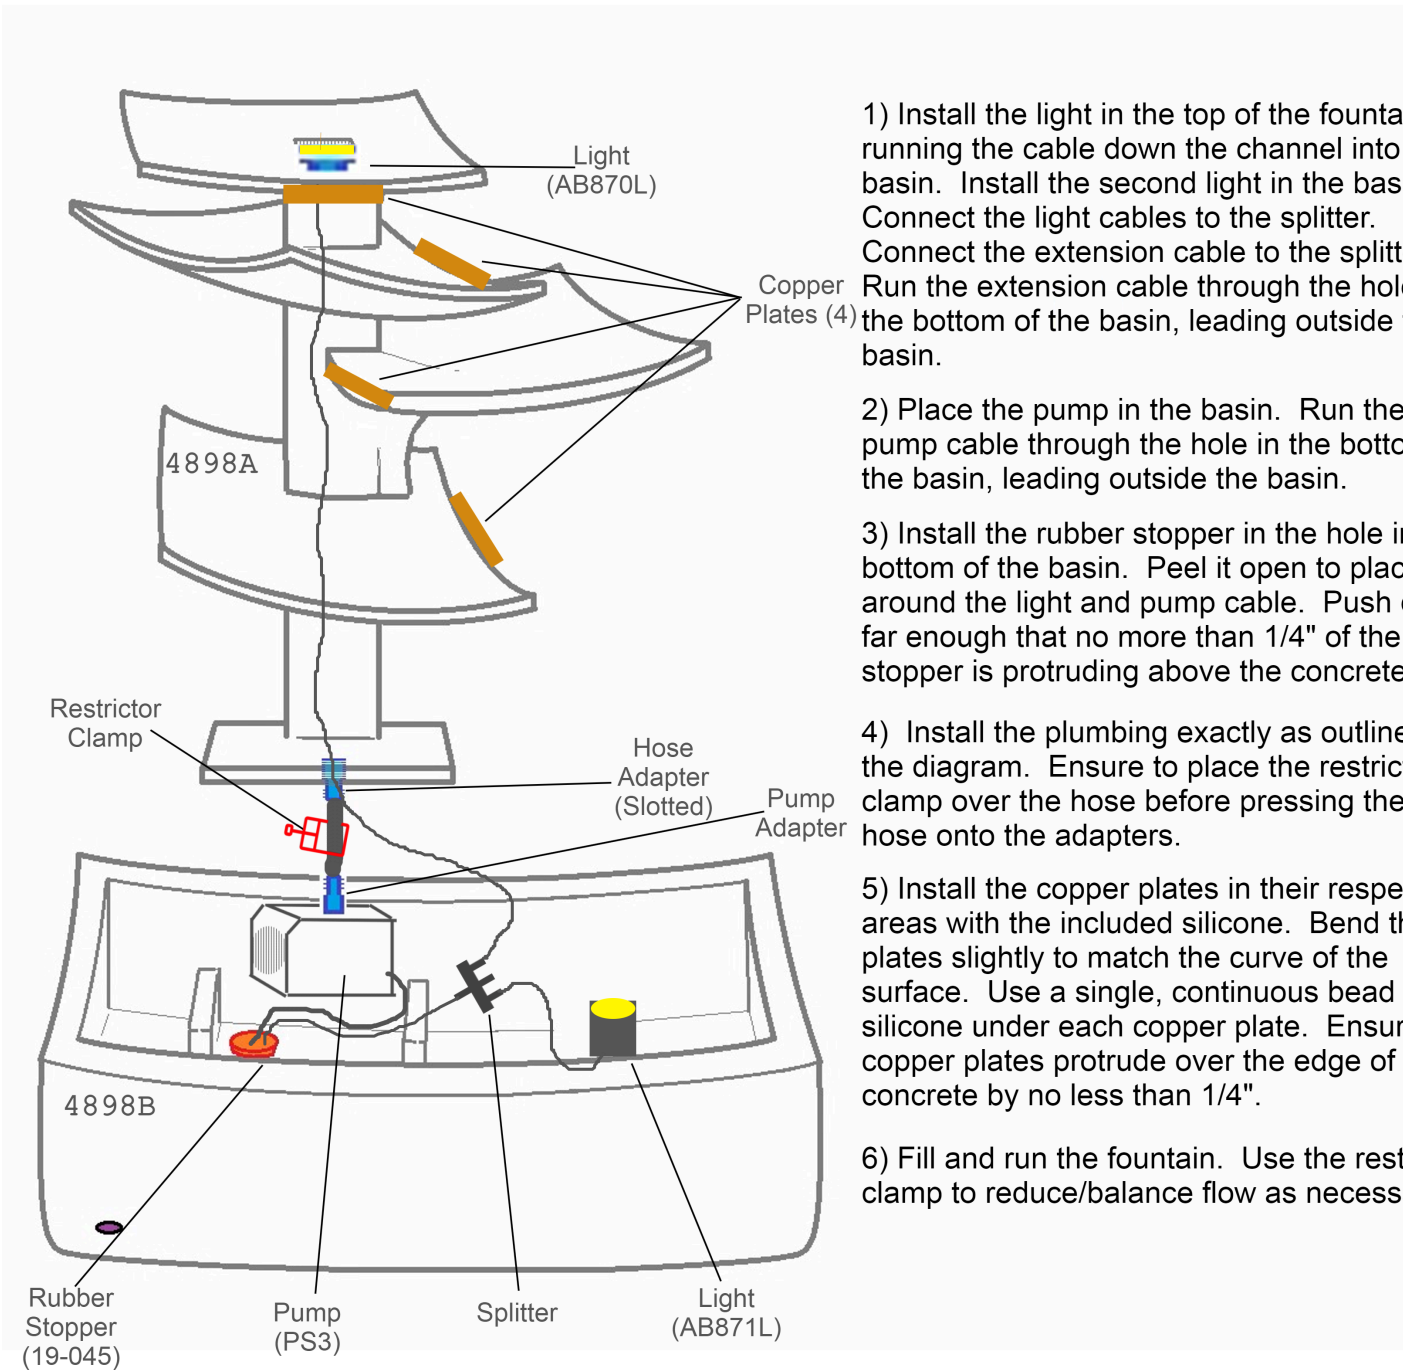

1) Install the light in the top of the fountain, running the cable down the channel into the basin. Install the second light in the basin. Connect the light cables to the splitter. Connect the extension cable to the splitter. Run the extension cable through the hole in the bottom of the basin, leading outside the basin.

2) Place the pump in the basin. Run the pump cable through the hole in the bottom of the basin, leading outside the basin.

3) Install the rubber stopper in the hole in the bottom of the basin. Peel it open to place around the light and pump cable. Push down far enough that no more than 1/4" of the stopper is protruding above the concrete.

4) Install the plumbing exactly as outlined in the diagram. Ensure to place the restrictor clamp over the hose before pressing the hose onto the adapters.

5) Install the copper plates in their respective areas with the included silicone. Bend the plates slightly to match the curve of the surface. Use a single, continuous bead of silicone under each copper plate. Ensure the copper plates protrude over the edge of the concrete by no less than 1/4".

6) Fill and run the fountain. Use the restrictor clamp to reduce/balance flow as necessary.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

Questions? Email ProductSupport@HenriStudio.com