

Pueblo Fountain (4939F2)

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.


1) Place pump in the bottom of the 4939B basin. Run the cable through the hole in the bottom of the basin, out and underneath the fountain. Screw the included black adapter onto the top of the pump.

2) Place one light into the 4939A upper bowl. Run the cable down through the hole in the bowl and into the basin. Screw the slotted adapter into the bottom of the 4939A, being sure to run the light cable through the slot of the adapter as you screw it into place. Attach the light cable to the splitter. Repeat for the other two lights in the other two bowls. Seal light wire in middle bowl with small stopper. When all light cables are attached to the splitter, attach the light extension cable to the opposite side of the splitter. Run this cable through hole in the bottom of 4939B, out and under the basin. Adhere the lights centered in the bottom of each bowl with the included silicone, ideally under water spills to illuminate the spilling water above.

3) Press the included black tubing onto the adapter affixed to the top of the pump. Push the other end of the tubing onto the adapter in the bottom of the 4939A.

4) Install copper spill plates. Lay down a continuous bead of silicone in the area the spills will be installed. Press the copper into the silicone, being sure to wipe away any excess silicone that gets pressed out of the gap. Ensure the copper is overhanging the edge of the concrete by at least 1/4"

5) In the basin, peel the rubber stopper open and wrap it around the pump and light cables passing through the hole in the basin. Each cable has a respective channel in the stopper for their respective sizes. Ensure each cable is seated well within its channel, straight up and down with no gaps in the stopper. Press the stopper into place within the hole, so that no more than 1/4" of the stopper is left protruding above the concrete.

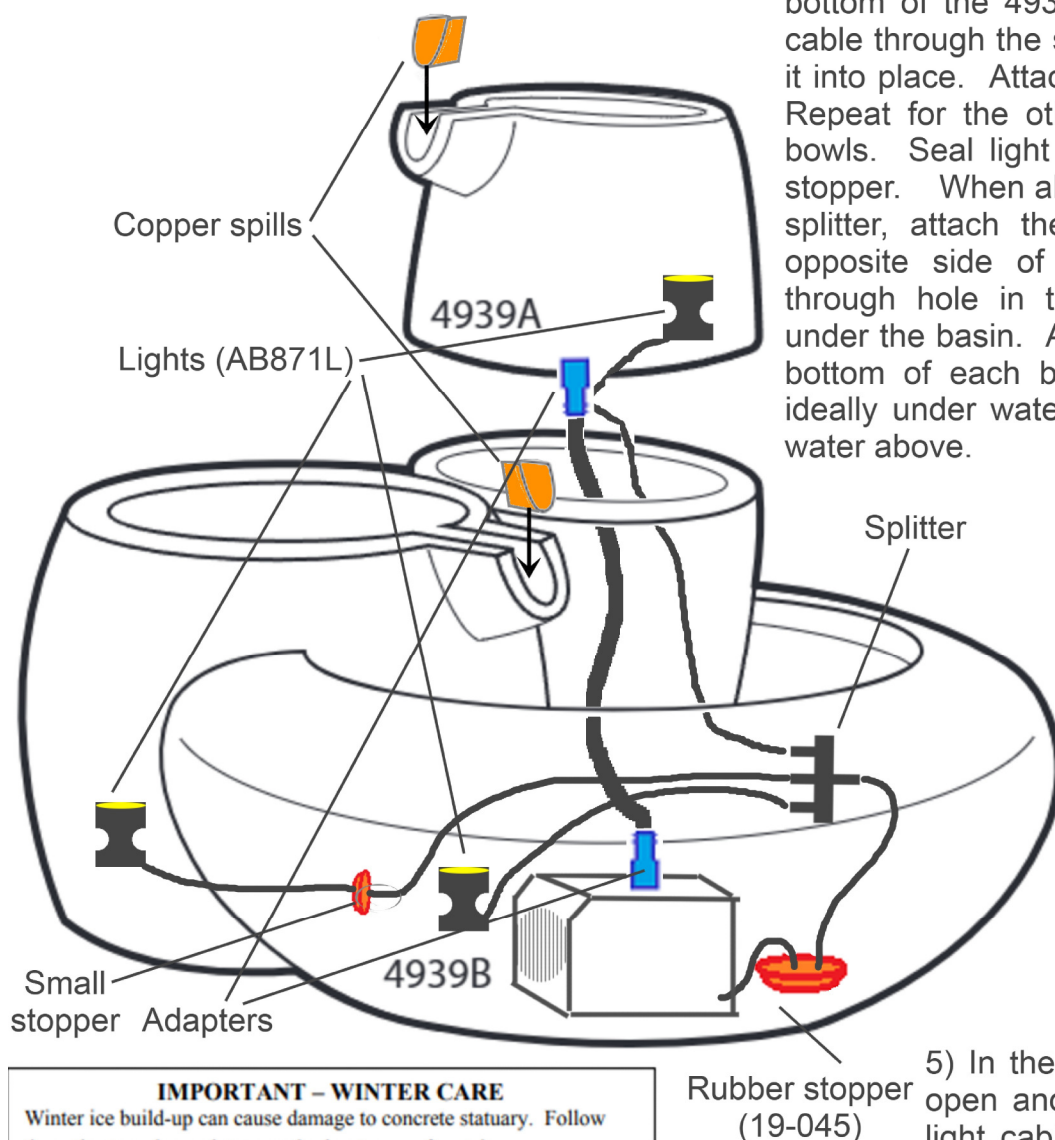

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.