

SETTING UP THE 5011F6 & 5011F5S

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Place the 6290 Bowl on your prepared surface. The bowl has a groove built under it intended to protect the power cord. Make sure to face that groove toward your power supply.

2) Place the Pump in the center and push the power cord down through the center hole. Pull the cord out from under the bowl and toward your power supply. Fit the Stopper with the Small Hole around the power cord and push into the Bowl's center hole to make water tight.

3) Thread the Barbed Adapter into the top of the pump. Push one end of the long tube onto the barbed end of the adapter.

4) Pulling the tubing up through the 7011 Pedestal, set this Pedestal over the pump.


5) With adequate help, place the 6011C Bowl on the 7011 Pedestal – pulling the tube up through the center hole as you do. Seal the hole by installing a Stopper around the tube and pressing tight. Use shims as needed to adjust to level bowl.

6) Slip the Flow Restrictor around the tube and pull down to about 6" above the stopper. Turn it tight enough to stay in place. You can use this later to turn down the water flow if you wish.

7) Set the 6011B BOWL/PEDESTAL on the 6011C, again pulling the tubing up through the center hole and sealing the hole with a stopper. Then, do the same with the 6011A BOWL/PEDESTAL.

8) Place the 5011 FINIAL on top, with the remaining tubing slipped up inside. Fill the bowl unit with water to about 1" from the top. (The 2 black filter sponges are provided to be fit into the 7011 pedestal's access door, to protect your pump from leaves and other debris.

9) Read your pump instructions. Then, plug in the pump to enjoy your fountain. If it does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start. If desired, you may dial down the top water action by pushing the tubing further down in the finial or reduce the general flow by tightening the restrictor.

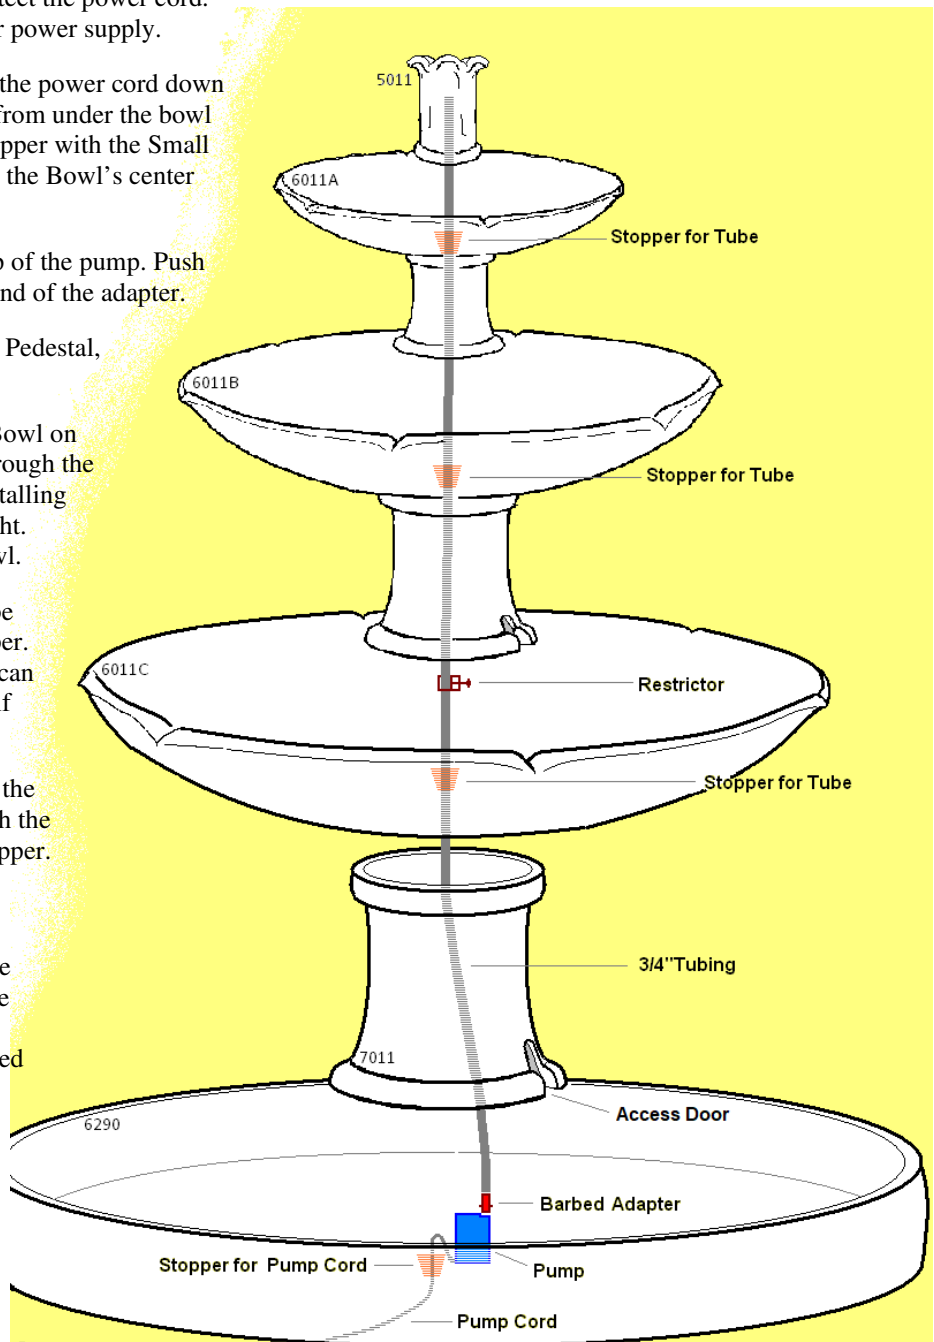

Csd

3/2023

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact: www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pump.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.