


Matrix Fountain (5017F2)

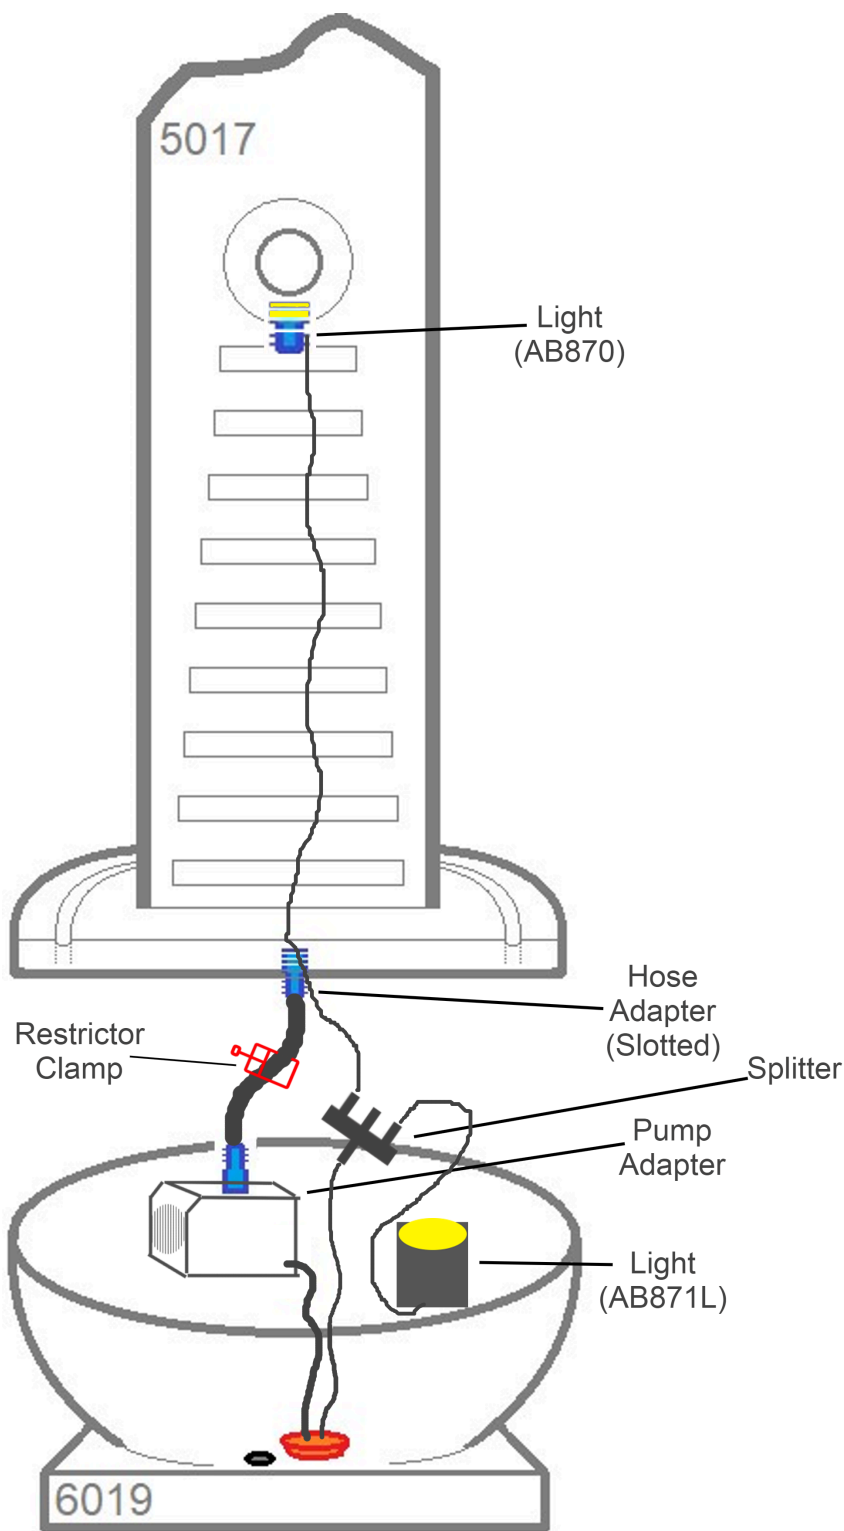

1) Install the light in the 5017. Run the light cable down into the basin. Screw the hose adapter to the bottom of the 5017, ensuring the light cable is running through the slot cut into the adapter.

2) Place the second light in the bottom of the basin.

3) Connect both light cables to the splitter. Connect the extension cable to the splitter. Run the extension cable through the hole in the bottom of the basin, leading outside the basin.

4) Place the pump in the basin. Run the pump cable through the hole in the bottom of the basin, running outside the basin.

5) Install the rubber stopper in the hole in the bottom of the basin. Peel it open to place it around the light and pump cables. Press down hard enough that no more than 1/4" of the stopper is protruding above the concrete.

6) Connect the plumbing exactly as outlined in the diagram. Be sure to place the restrictor clamp over the tubing before pressing the tubing onto the adapters.

Questions? Email
ProductSupport@HenriStudio.com

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.