

SETTING UP THE 5054F1

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Set your fountain piece on your prepared site, facing toward your most common viewing point.


2) Find the four copper spill plates in your connection kit and match them to the four water spill sections in the bowl rims of your fountain. Use the provided silicone sealant to lay solid lines of sealant across the spill areas. Then press the copper spill plates into the sealant. For best water fall results, the plates should overhang the concrete edge by up to 1/4". The sealant should start to skin after about 10 minutes.

3) Place the light (in front) and pump (in recessed area) in the bottom bowl. Push their power cords out the lower hole in the back. Open the slit on the rubber stopper, place power cords in the appropriately sized grooves, close slit, then mosh the stopper into the lower hole in the back of the fountain. About 1/8" of the stopper should remain inside the fountain.

4) Thread the small barbed adapter into the top of the pump. Thread the large barbed adapter into the top hole in the back of the bottom bowl. Attach the water tube to the barbed end of each of these adapters.

5) Insert the middle leg of the tee into the hole in the top bowl. Face the tee's openings away from the spill area. This will help the water run smoothly at the top.

6) Fill all bowls with water. Read pump and light instructions. Turn on the pump. Connect the light to transformer and plug in transformer. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start.

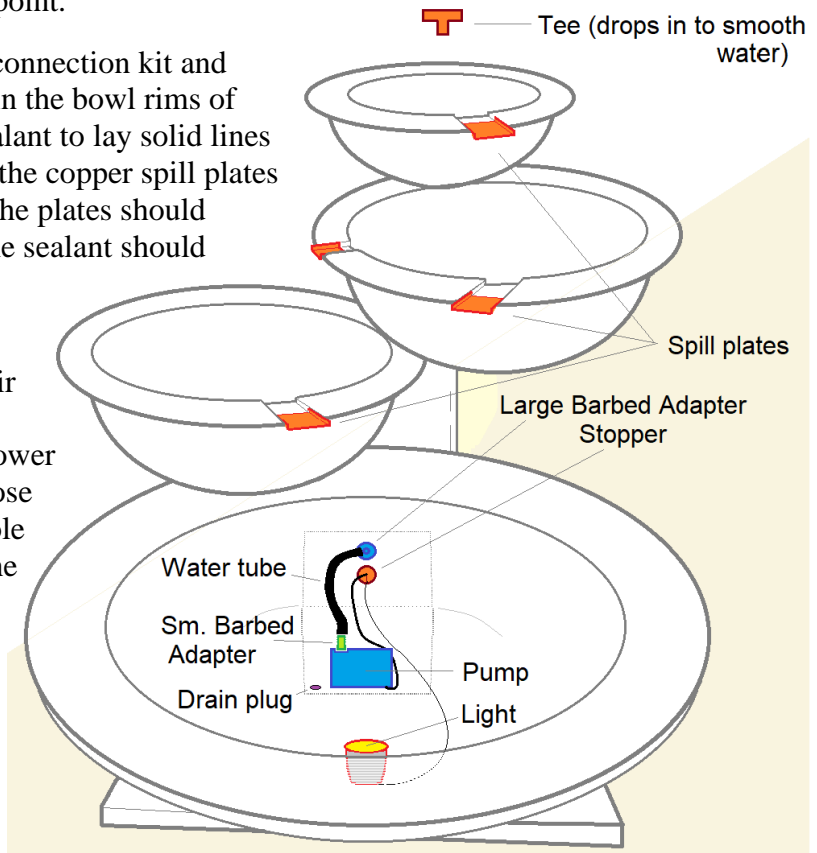

Csd 1/2023

Online Resources
Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact : www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE
Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:
* Disconnect power to pumps and lights.
* Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
* Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
* Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.