


Cascading Bowls 5055F3

1. Place a light in each bowl, and run the light cable out through the hole in the center of each bowl. Place the final light in the bottom basin.
2. Stack the bowls atop one another as illustrated, and run the light cables from each bowl down through the hole in the bowl(s) below it. Connect these light cables to the splitter as illustrated. There should be a total of four lights connected to the splitter.
3. Connect the extension (wall) cable to the splitter, and route that cable out through the hole in the bottom of the basin.
4. Place the pump in the basin and run the power cable out through the hole in the bottom of the basin.
5. Place the two-hole rubber stopper around the light and pump cables in the basin, and press the stopper into the hole. The stopper should be inserted far enough that no more than 1/4" is left protruding above the concrete.
6. Drop the black tubing through the top bowl and run it all the way down to the basin as illustrated. Place the single large-hole rubber stoppers around the tubing at each bowl, starting from the bottom. Connect the basin end to the pump, the other end to the connection of the light in the top bowl as shown. Place the single large-hole rubber stoppers
7. Install copper spills. For each bowl, lay down a continuous bead of silicone caulk in the cut out spill area of each bowl (vertical edges and horizontal edge). Press the copper plate onto the bead of silicone, ensuring there is at least 1/4" of copper overhanging the concrete on the spilling-over edge.

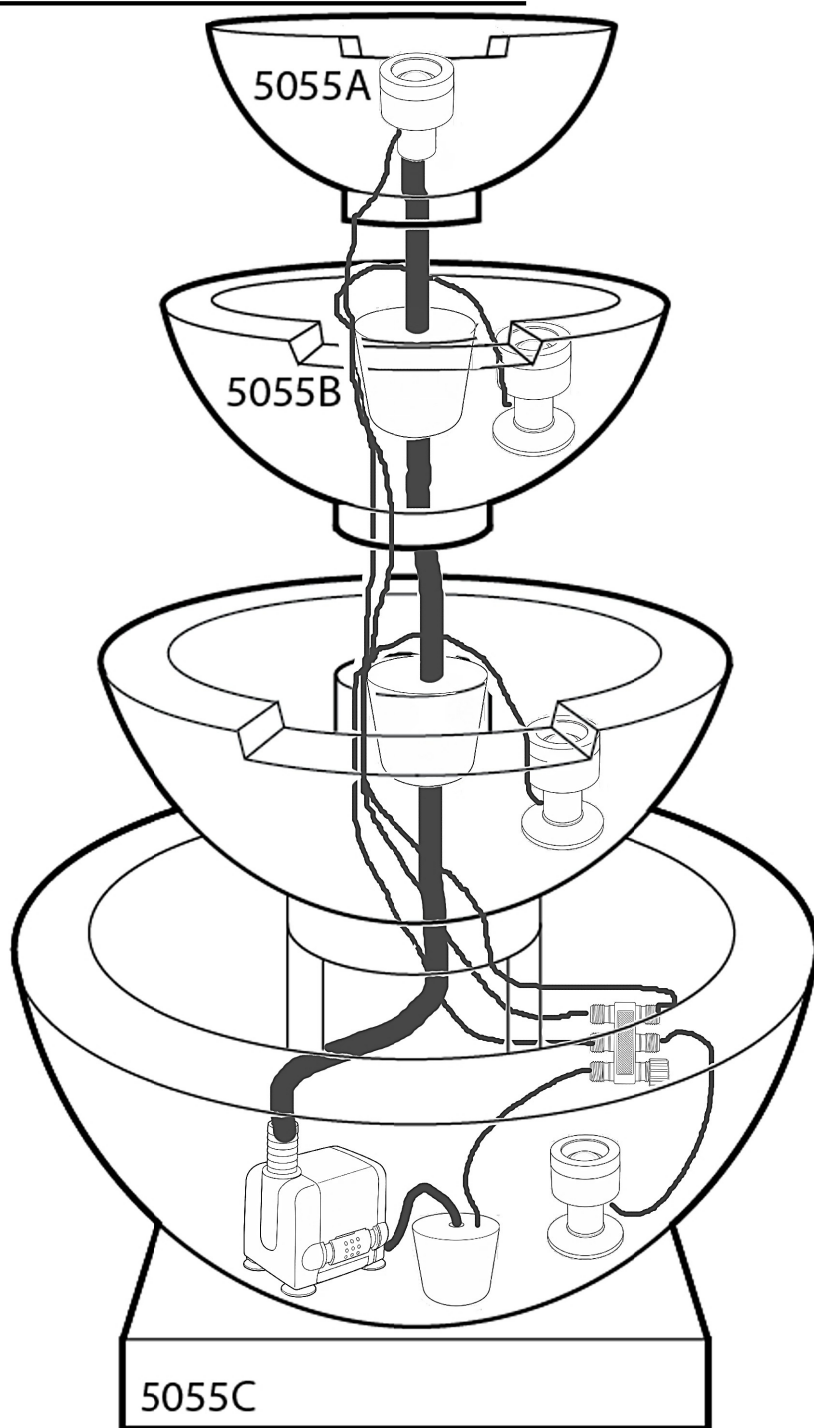

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Questions? Email
ProductSupport@HenriStudio.com

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.