


set up instructions for: 5125F Fluted Fountain, 4 pc.

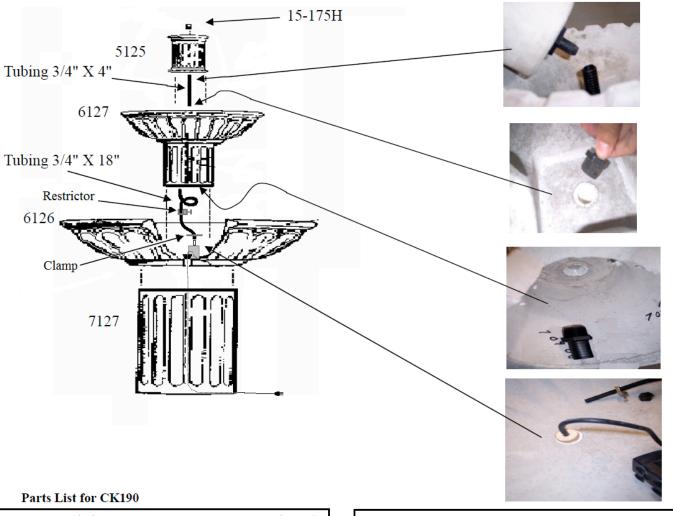

QT	Y Description	Henri Part #
1	Fact Book	60-01H
1	RESTRICTOR R1 RESTRICTOR SMAL	LL 20-06H
1	STOPPER, RUBBER	19-047
1	CLAMP, LG SCREW 5/8" TO 1 1/2	15-119Н
1	NKT3/4" X 18"	04-35H
1	NKT3/4" X 4"	04-35H

QT	Y Description	Henri Part #
1	NIPPLE, 3/4 CLOSE NYLON	15-175H
3	ADAPTER 3/4" MPT X 3/4" BARB	15-157H
1	P350 PUMP	24-41H
1	BUSHING 1/2" x 1/4" POLY FOR PUMP	15-231H
1	HT WARRANTY CARD	60-03H
1	HT COMPANION SELL SHEET	60 - 04H

Please note: Always follow local electrical codes and use 110V GFCI protected outlet.

Nota: Siempre siga los códigos électricos locales y utilizar un GFCI 110V protegida toma de corriente.

Remarque: Suivez toujours les codes électriques locaux et une utilisation 110V GFCI protégées prise de courant

9/10/2014

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights. * Do not allow snow or ice to build up on or against the concrete.
- * Remove plugs / stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Place an absorbant material like burlap, blankets, etc. inside vases/bowls and cover all with a Henri fountain cover.
- * Remove snow before it turns to ice. Do not use salt or chemical ice removers as these may damage concrete.