

SETTING UP THE 5264F2

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.


1) Place the 6264B Basin on your prepared site. Turn it so the two inner pedestals line up with the direction you intend your top piece to face.

2) Place the Pump in the middle of the bowl and run its power cord down through the center hole and out from underneath toward your power source. Run the longer light cord down through the hole in the same way, leaving about 16" of it above the basin floor for future connecting.

3) Open the slit in the Stopper and place the power cords within the custom cast holes fitting each of their sizes. Close the slit and press the stopper into the center hole to make the basin watertight.

4) Slip the Pump Exhaust fitting into the top of the pump. Push the 1/2" Water Tube onto the pump fitting. Push the barb of the barbed adapter into the other end of the 1/2" tube.

5) Set the 5264A Top outside of but next to the basin. Push the 3/4" barbed connector underneath the light (if not already attached) and then push one end of the 3/4" Water Tube onto this barb connector. Next, insert the light cord and tube down through the top of the 5264A Top. The power cord should be inserted first and then the tube pushed down alongside the cord. Both should extend out the bottom for the time being.

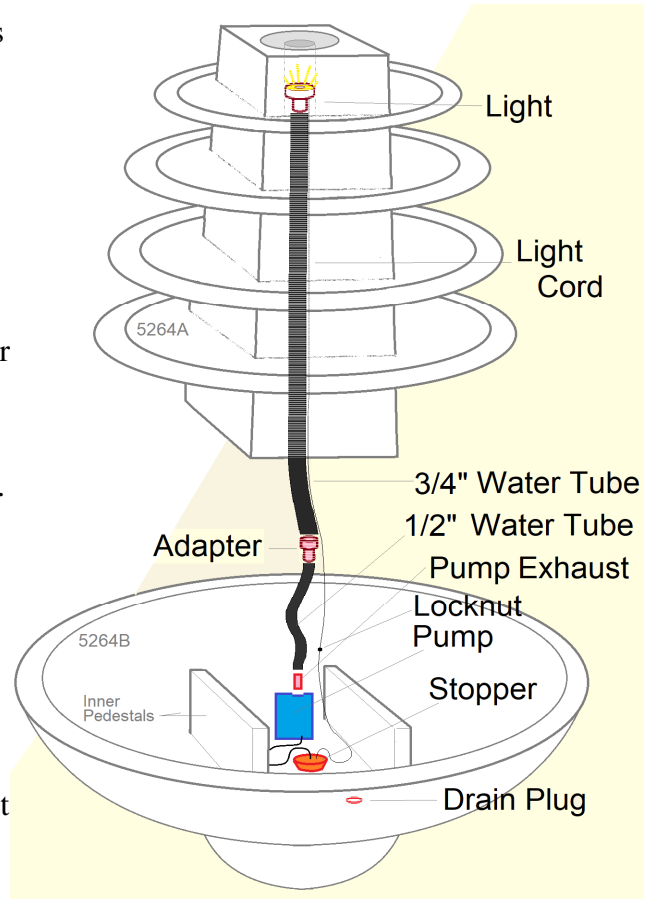

6) As you lower the 5264A in place on the 5264B Basin, you will need to connect the tubes and light cords. Push the water tube from the top over the threaded half of the barbed adapter in the smaller tube. Then push the two-pin connector from the upper light cord into the lower light cord. Lock them together with the locknut, making it snug but do not over tighten.

7) Fill all levels of the fountain with water. Read pump and light instructions. Turn on the pump and light. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start. Csd 12/2022

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact: www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.