


## SETTING UP THE ...5348F2 (A or B)

- 1) Prepare a suitable location for your new fountain. The fountain needs the support of a firm and level surface.
- 2) Securely slip one end of the water tube over the barbed attachment under the AB870 light. Set the fountain top on its side. Insert the water tube and light power cord together down through the hole in the fountain top, pulling them down and out until the light rests snugly in the hole.
- 3) Set the pump in the fountain basin and push the power cord down through the large hole in the basin floor. Insert the bottom end of the light power cord also into the same large hole in the basin. Push both power cords all the way through the basin floor, pulling out the bottom and through the cord notch toward your power connection.
- 4) Pull open the two slits in the two-hole rubber stopper, place the stopper's larger hole on the pump cord about 10" from the pump body and place the stopper's smaller hole around the light power cord. The stopper's larger end should be toward the top.
- 5) Place the flow restrictor about 5" from the lower end of the water tube, tightening just enough to hold it in place there. (Once operating the fountain, you can tighten the restrictor to lessen your water flow if desired.)
- 6) Thread the barbed adapter into the pump top. Push the water tube onto the pump adapter barb.
- 7) Set the fountain top on the basin.
- 8) Read your pump and light instructions. Fill the bottom bowl with water. Plug the pump in and connect to the light transformer to enjoy your fountain. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start.

Make sure to place your fountain on a firm area which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet.

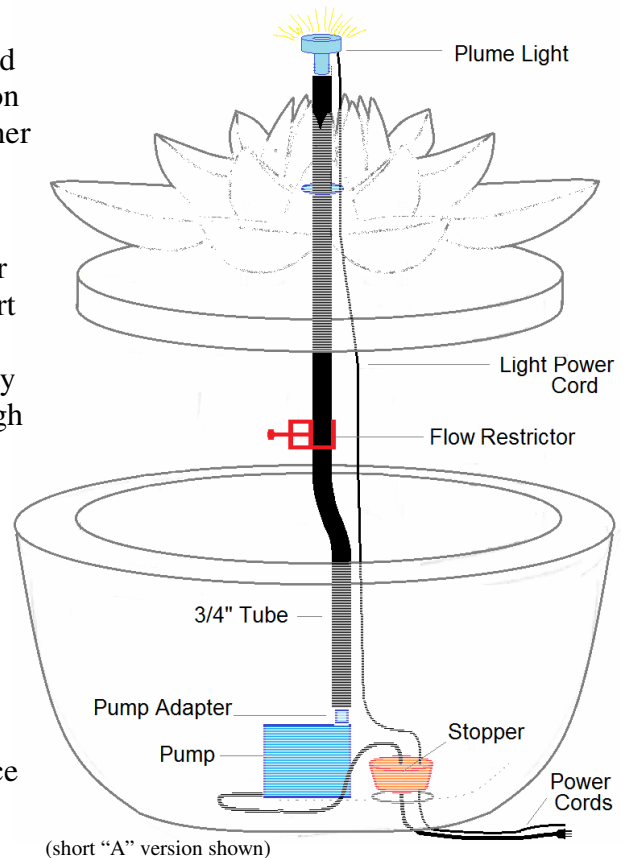

esd 7/7/2019

### Online Resources

Products: [www.henristudio.com/products](http://www.henristudio.com/products)  
FAQs: [www.henristudio.com/faq](http://www.henristudio.com/faq)  
Warranty: [www.henristudio.com/warranty](http://www.henristudio.com/warranty)  
Contact: [www.henristudio.com/contact-us](http://www.henristudio.com/contact-us)

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

### IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- \* Disconnect power to pumps and lights.
- \* Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- \* Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- \* Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.