





5510F5 Traviata Two-Tier Fountain




1 Start with a flat and leveled surface



Make sure to place your fountain on a firm area which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet.

Continue setting the fountain, starting with the bottom piece.

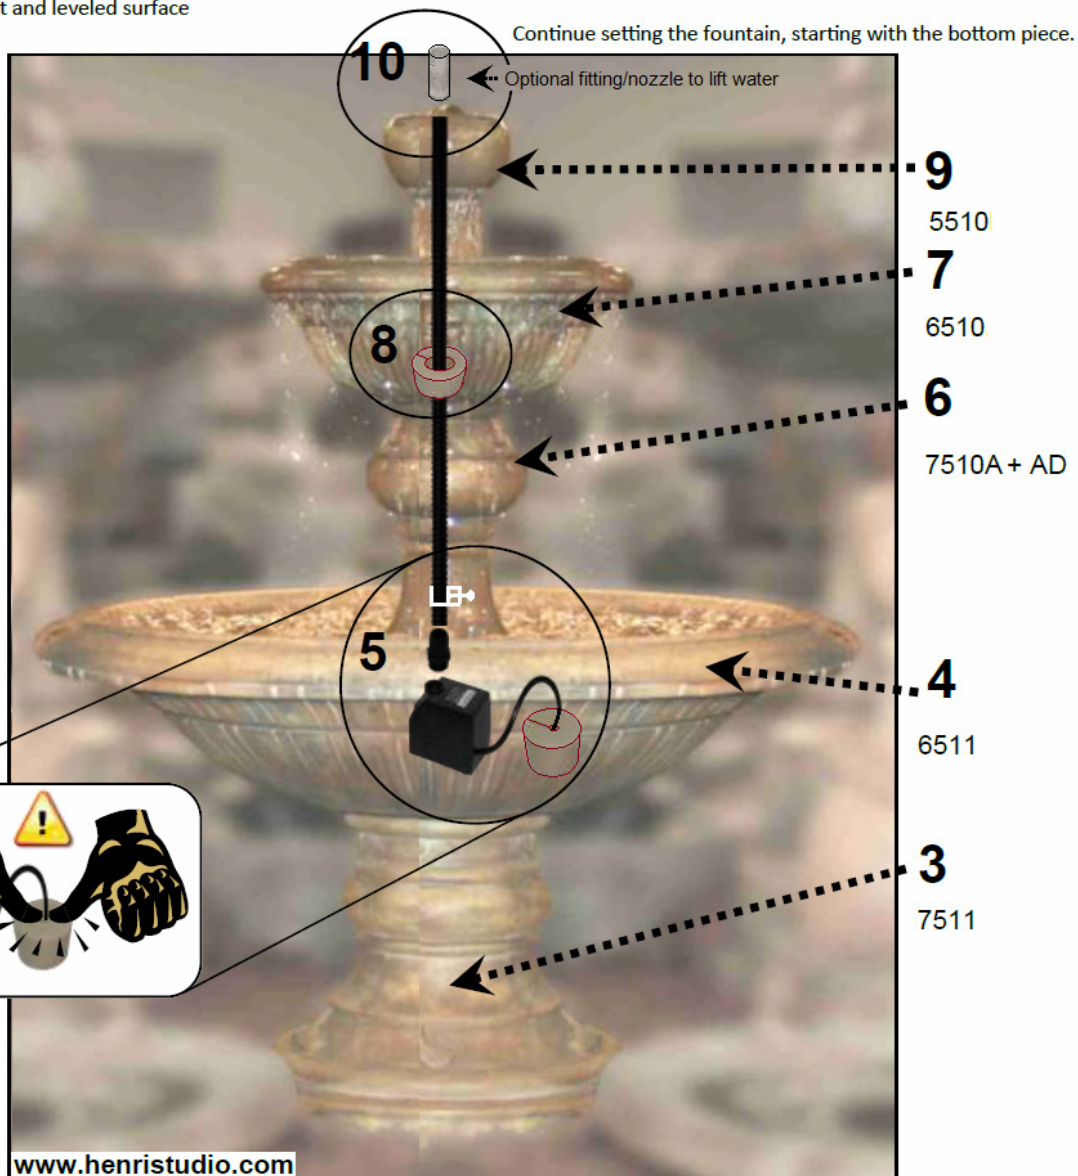




11 Fill with water.



12

Connect to outdoor-rated electrical outlet.

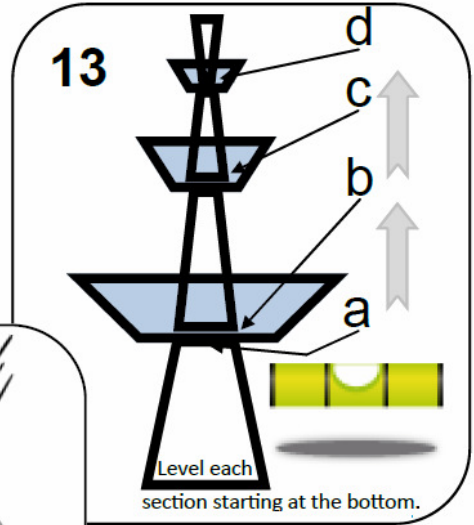

13

Level each section starting at the bottom.

Parts List:

		CK423	
QTY	ITEM	PART No.	
1	PS3 PUMP	24-063	-US/CN
		24-063U	-UK
		24-063G	-GER
1	Adapter 1/2" FNPT X 3/4" Barb	15-058	
1	NKTubing 3/4" X 34"	04-035	
1	Rubber Stopper UK 1 HOLE	19-047	
1	Rubber Stopper UK3/4"	19-049	
4	SHIM, PLASTIC BREAKOFF	01-058	
1	NIPPLE 1/2" X 2.25"	15-035	
1	Restrictor	20-006	

Online Resources
 Products: www.henristudio.com/products
 FAQs: www.henristudio.com/faq
 Warranty: www.henristudio.com/warranty
 Contact : www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE
 Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Place an absorbant material like burlap, blankets, etc. inside vases/bowls and cover all with a Henri fountain cover.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.