

## SETTING UP THE **5516F2UG**

Make sure to place your fountain on a firm area which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Read the entire instruction for your underground basin before starting installation. Only then should you measure, dig the hole, fill with water, and backfill.

2) Thread a barbed adapter into the pump and push one end of the water tube onto that pump adapter's barb. Then, open the door on the top of the basin and slide the pump down into the basin. Find the hole in the top of the basin sized large enough for the water tube and push the tube up through it. Do the same with the power cord.


3) Thread the other barbed adapter underneath the 5516 fountain top. Push the open end of the tube over the barbs as you gently set the 5516 top onto the basin.

4) Screw the threaded end of the gray pipe assembly into the center hole of the top ball piece. Push the valve on top of this gray pipe and then push the clear pipe into the other end of the valve. Make sure all these connections are snug.

5) Slip the light ring over the clear pipe. It should rest on the valve. Run its power cord down through the off-center hole in the floor. Continue to run the light power cord into the underground basin. If an easy opening is not found, you can widen any of the small drain lines in the basin's top by twisting a wide screw driver in it and then pushing the light cord down through the new hole. Then grab the power cord through the open door atop the basin and pull it out along with the pump power cord toward your power supply.

6) Seal the floor hole in the ball top by opening the slit in the rubber stopper, placing the light power cord into the round molded hole, closing the slit, and pressing the stopper into the hole. About 1/8" of the stopper should be left above the floor in case you decide to remove it later. *(For extra watertightness in the ball piece, which has a concrete hole rather than a coupling, you may want to add some of the silicone sealant provided. You can squeeze some into the concrete hole before pressing the stopper into place or simply apply some sealant over the seam between the stopper and concrete floor after installing the stopper.)*

7) Slide closed the access door atop the basin. Fill the basin the rest of the way with water. Read pump and light instructions. Connect the light cord to the transformer and plug in. Plug the pump in. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start. Cover the basin with stone or other material if you wish. Csd 5/2022

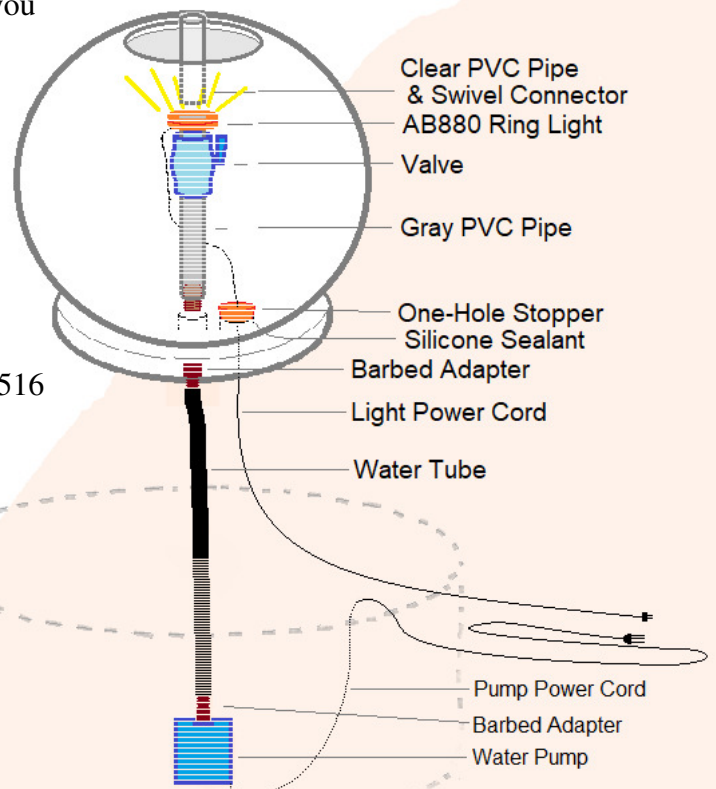

**Online Resources**  
Products: [www.henristudio.com/products](http://www.henristudio.com/products)  
FAQs: [www.henristudio.com/faq](http://www.henristudio.com/faq)  
Warranty: [www.henristudio.com/warranty](http://www.henristudio.com/warranty)  
Contact: [www.henristudio.com/contact-us](http://www.henristudio.com/contact-us)

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

### IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- \* Disconnect power to pumps and lights.
- \* Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- \* Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- \* Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.