


Nirvana Fountain (5619F2)

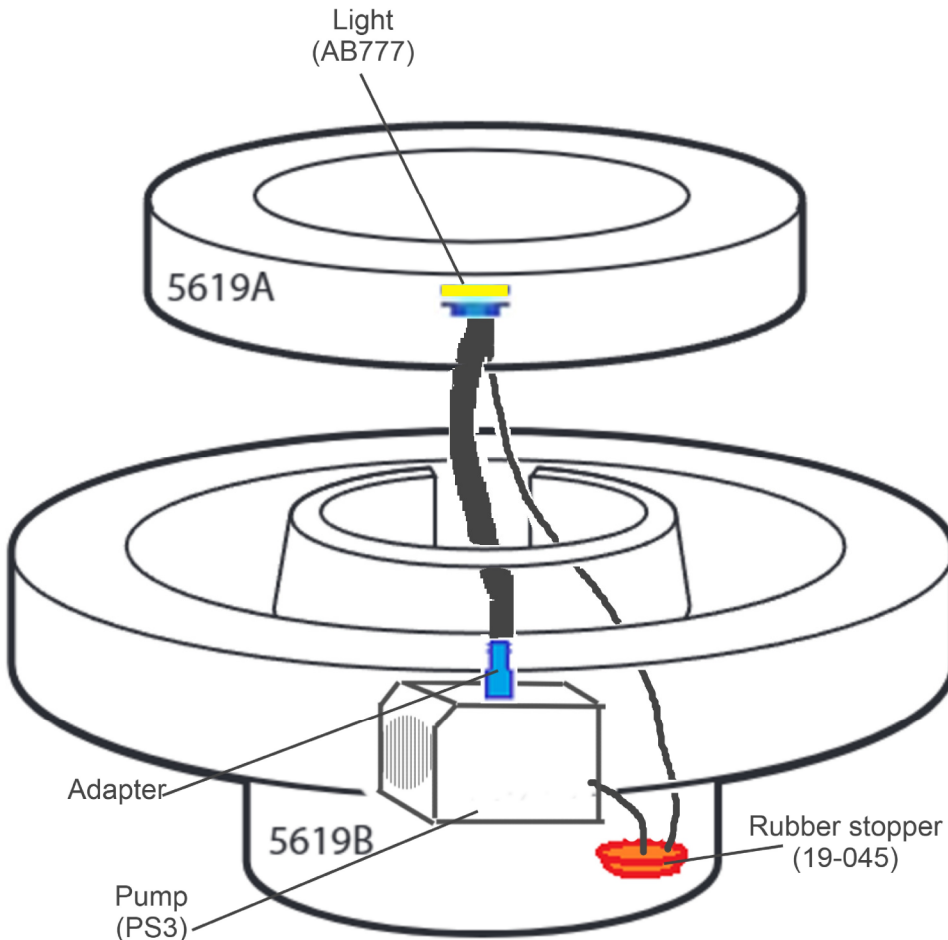

- 1) Place light into the recess in the bottom of the 5619A. Run the power cable for the light down through the hole and into the 5619B. Run the cable out through the hole in the bottom of the 5619B and out under the fountain.
- 2) Place the pump into the 5619B and run the pump cable out through the hole in the bottom of the 5619B and out under the fountain.
- 3) Press the length of tubing onto the barbed adapter on the bottom of the light and the adapter on top of the pump.
- 4) In the basin, peel the rubber stopper open and wrap it around the pump and light cables passing through the hole in the basin. Each cable has a respective channel in the stopper for their respective sizes. Ensure each cable is seated well within its channel, straight up and down with no gaps in the stopper. Press the stopper into place within the hole, so that no more than 1/4" of the stopper is left protruding above the concrete.

Questions? Email
ProductSupport@HenriStudio.com

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.