SETTING UP THE 5702F2


Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

Set Basin on prepared site.

Place Pump in basin, push power cord through hole in floor and pull out from underneath. Install rubber stopper around power cord and press firmly into hole.

Thread adapter into pump and push tube onto adapter.

Set upper piece on basin, then one person pulls back while the other...

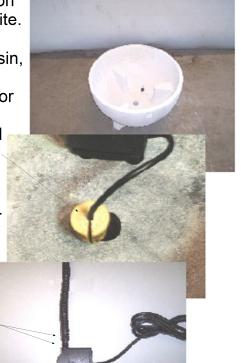

Thread nozzle into top bowl.



...threads the remaining adapter into the bottom of the upper fountain piece. Then, push the open end of tube onto the adapter and set the upper fountain piece back on the basin.



Fill basin with water. Read pump instructions. Turn on the pump. If it does not immediately begin working,

there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start.

Csd 9/2021

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact: www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT - WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.