


SETTING UP THE 5705F9S, 5705F18

Make sure to place your fountain on a firm area which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet.

- 1) Prepare a suitable location for your new fountain. If you have the 5705F18, place the fiberglass pool on the prepared location. If you have the 5705F9S you have a different pool or water container to use.
- 2) Place the water pump (and lights if you are using optional lights) in the pool and run the power cord down through the pool's standpipe. Pull the cord out from underneath toward your power source. Then seal the top of the standpipe by opening the slit in the 3-hole stopper and placing the pump power cord in the largest hole, close the stopper and press into place.
- 3) Insert the barbed adapter into the top of the pump, place long tube on the adapter barb and clamp. Set 7709 base down over pump and standpipe. Set 6709SC bowl on the 7709, pulling the tube up as you set the bowl down.
- 4) Open a single-hole stopper, place around the tube, and press into the center hole in the bowl. Push one end of the tee into the tube and clamp. Push a short 1/2" tube onto the small leg of the tee and clamp. Place a flow restrictor onto the middle of the 1/2" tube and tighten enough keep it there. Push another longer tube over the open end of tee.
- 5) Set the 7708SC base in the 6709SC bowl, pulling the tube up as you do. Notice in the drawing that from this point upward, it is recommended to apply a line of caulk tape (provided) along the top and bottoms of every base as you add concrete pieces. The purpose of the caulk tape is to add stability to the nine stacked pieces.
- 6) Set the 6708 bowl on the 7708SC base, pull the tube up through the center hole and install a single-hole stopper around the tube as before, pressing tightly into the bowl. Then, repeat all the steps of #4 above to construct another tee assembly.
- 7) Set the 7707 base in the 6708 bowl. Thread the 6" long standpipe into the 6706 bowl and place that bowl on the 7707 base, pulling the tubing up and through the center every time.
- 8) While still applying the caulk tape between pieces, set the 7705 base on next and then the 6705 bowl. As you are setting the final piece in place – the 5705 final top – slide the tube all the way up inside the finial.

- 9) Stand back and view your fountain, checking to see if all levels are lined up as you desire. Then, read your pump instructions. Fill the bowls with water. Then plug the pump in to enjoy your fountain. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start.

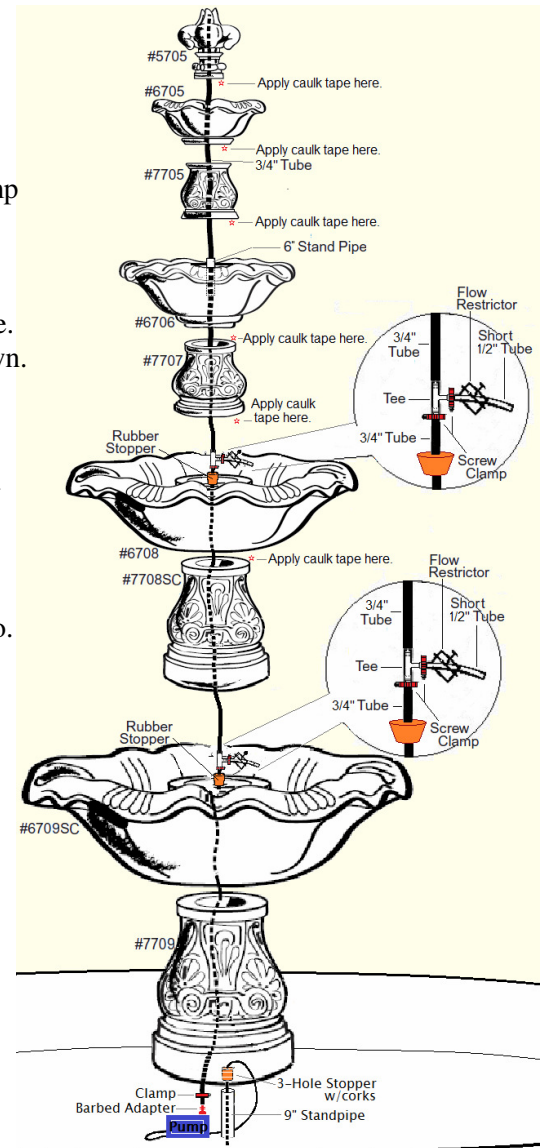

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Place an absorbant material like burlap, blankets, etc. inside vases/bowls and cover all with a Henri fountain cover.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact: www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Csd

4/19