

SETTING UP THE 5706F2

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Set your new fountain basin on your prepared site.

2) Place the fountain top piece next to the basin. Push the Light's power cord down through the hole in the top of this piece and pull out all excess cord from underneath. Light should fit snug into a recessed ledge inside the hole.

3) Place pump in the recessed utility area inside the basin's bowl. Push the pump cord and the loose portion of the light cord down through the wide hole in this area. Pull them both out from under the fountain and direct them toward your power supply.


4) Back inside the basin's bowl, open the slit in the rubber Stopper. Set the power cords in the mold holes (larger is for the pump cord) and close the slit again. Push the stopper down into the hole through which the cords leave the bowl. Leave about 1/8" of the stopper above the basin floor for future ease of removal.

5) Thread solid barbed Adapter into the pump top. Push the water Tube onto this barb and then install a water flow Restrictor onto the middle of the tube. (The restrictor can be tightened later if you wish to turn down your water flow.)

6) Grasp the remaining barbed Adapter which has a slot cut into the threads. Hold it under the fountain top piece, situate the light cord – where it exits the bottom of the fountain top – into the cut groove, and gently thread this adapter into the coupling under the fountain top.

7) With help, lower the fountain top into the fountain basin – attaching the open end of tubing to the barb under the top prior to setting it down.

8) Fill both bowls with water. Read pump and light instructions. Turn on the pump and light. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start.

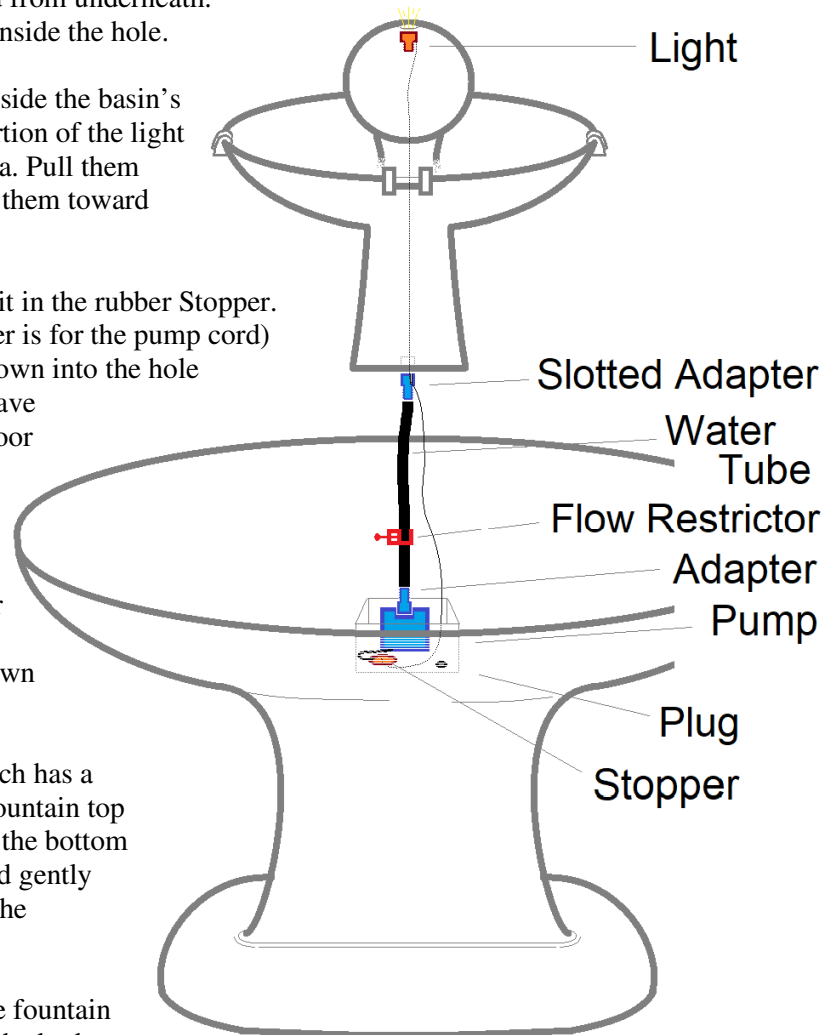

Csd 10/2022

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact: www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pump and light.
- * Remove plug/stopper in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.