

# SETTING UP THE 5715F2

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Prepare a suitable location for your new fountain, with a firm and level surface.

2) Always follow local electrical codes. Make sure to connect to a safe GFCI circuit.

3) Place the fountain's basin unit on its finished location. Notice that one side of the basin bottom has a groove to allow power cords out. Face that side closest to your power source.

4) Place the pump in the basin and slip its power cord down through the center basin hole. Pull the power cord out the bottom of the basin unit toward your power supply.


5) Place the rubber stopper around the power cord (just a few inches from the pump) and press it into the center hole to create a water tight seal.

6) Thread the 15-245 Adapter into the top of the pump.

7) Thread the larger 15-248 Adapter into the underside of the fountain top piece. Push one end of the water tube onto that adapter. Slip the 20-006 Restrictor a few inches over the other end of the tube and tighten it just enough to keep it in place. (This restrictor can be tightened later if you want to reduce your water flow.)

8) With help, hold the top fountain piece over the basin. Push the other end of the water tube onto the barb of the pump adapter. Then, gently set the top piece in the basin.

9) Fill the bowl unit with water to about 1" from the top. Read your pump instructions. Then, plug in the pump to enjoy your fountain. Two shims are provided in case you want to adjust the level of fountain top piece. If the pump does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start. Csd 9/2021

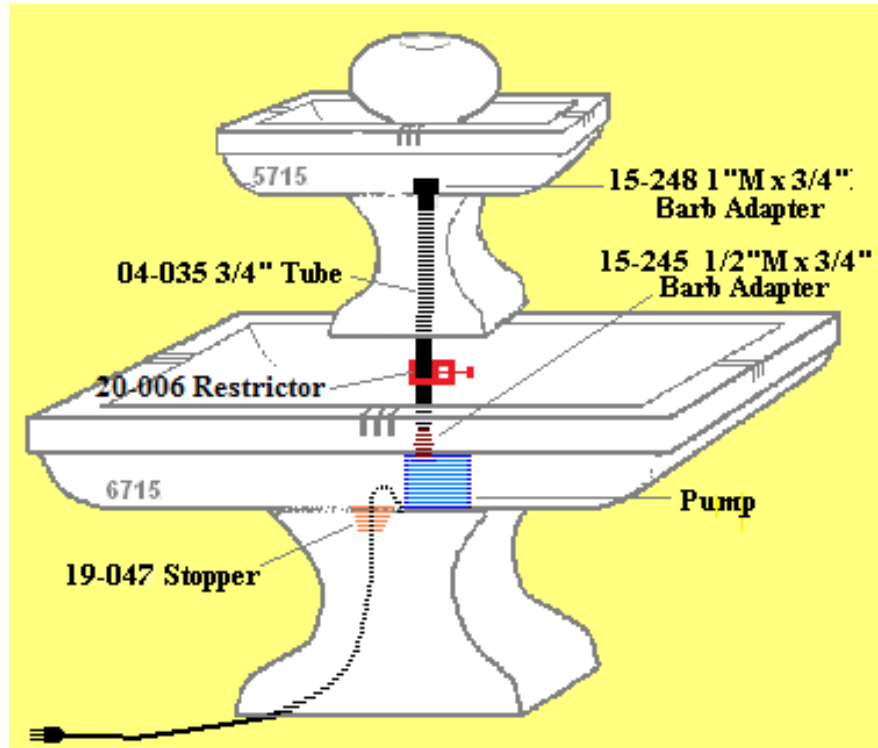

**Online Resources**  
Products: [www.henristudio.com/products](http://www.henristudio.com/products)  
FAQs: [www.henristudio.com/faq](http://www.henristudio.com/faq)  
Warranty: [www.henristudio.com/warranty](http://www.henristudio.com/warranty)  
Contact : [www.henristudio.com/contact-us](http://www.henristudio.com/contact-us)

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

## IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- \* Disconnect power to pumps and lights.
- \* Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- \* Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- \* Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.