

SETTING UP THE 5731F1

Make sure to place your fountain on a firm area which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

1) Preparing the area this fountain is to sit on is perhaps the most important part of set up. Because this is a tall, slender fountain, it is very important to place it on a flat, even, and stable setting.

2) After facing the smaller bowl toward your preferred viewing angle, thread the two Barbed Adapters into the top of the pump and into the coupling in the wall of the lower bowl.

3) Attach the Tube to the pump adapter. Lightly clamp the Flow Restrictor to the middle of the tube. This can be tightened later if you choose to decrease the water flow.


4) Place the pump and the light in the bottom of the lower bowl. Push their power cords down through the coupling in the floor of the bowl. Leaving some slack in the bowl, pull the power cords out from underneath and situate them coming out from under the notch in the back left corner of the fountain – toward your power supply.

5) You now need to seal up the hole in the bottom of the fountain. Open the slit in the Rubber Stopper which leads to the larger hole in the center. Place the pump cord (near the bowl floor) in this hole and close the slit. Do the same for the light power cord. Then push the stopper into the hole in the floor. About 1/8" of the stopper should remain above the floor.

6) Push the open end of the water tube onto the barbed adapter in the wall of the lower bowl.

7) Install the three copper spill plates. First, check the fit of each spill plate in the fountain opening (see drawing) to decide which plate mounts in each opening. Using the supplied silicone sealant, lay a solid line of sealant down across each spill opening and 3/8" up the sides of the opening. Then place the plate in the opening so that it overhangs the front of the fountain by roughly 1/4" to help the water break cleanly over the edge. Let the sealant cure for 60 minutes before running water over it.

8) Fill with water. Read pump and light instructions. Turn on the pump. If it does not immediately begin working, there may be an "airlock" within the impeller chamber. Simply unplug and plug in a few times and it should start.

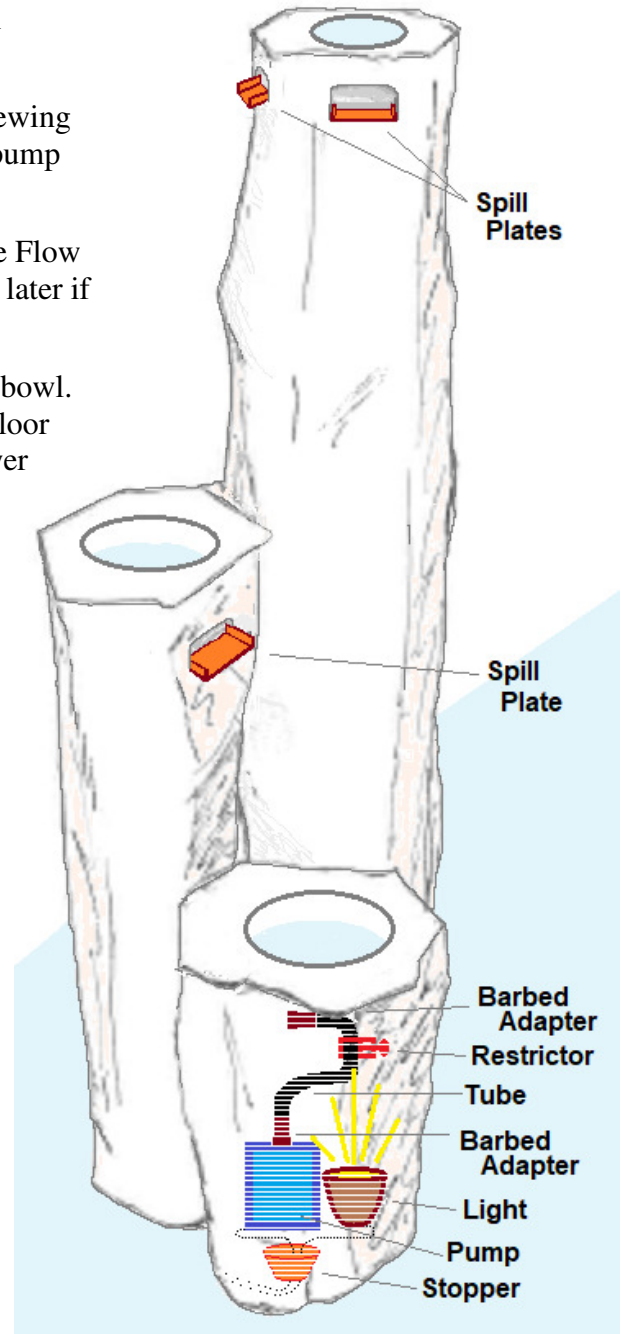

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact: www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

6/2021