


SETTING UP THE 5760F3

Make sure to place your fountain on a firm area which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet.

- * Assemble pump kit as shown.
- * Place in pool and run cord down through hole, sealing the hole with the rubber stopper. Pull cord out the side toward power supply.
- * Place pedestal on pool around the pump kit.
- * With help, set feature piece on pedestal – pushing tube onto the underneath pipe attachment as you set it down.
- * Fill pool with water, read pump instructions, and turn pump on. If pump does not immediately start, there may be air in the impeller chamber. Simply unplug and restart several times and it will clear.

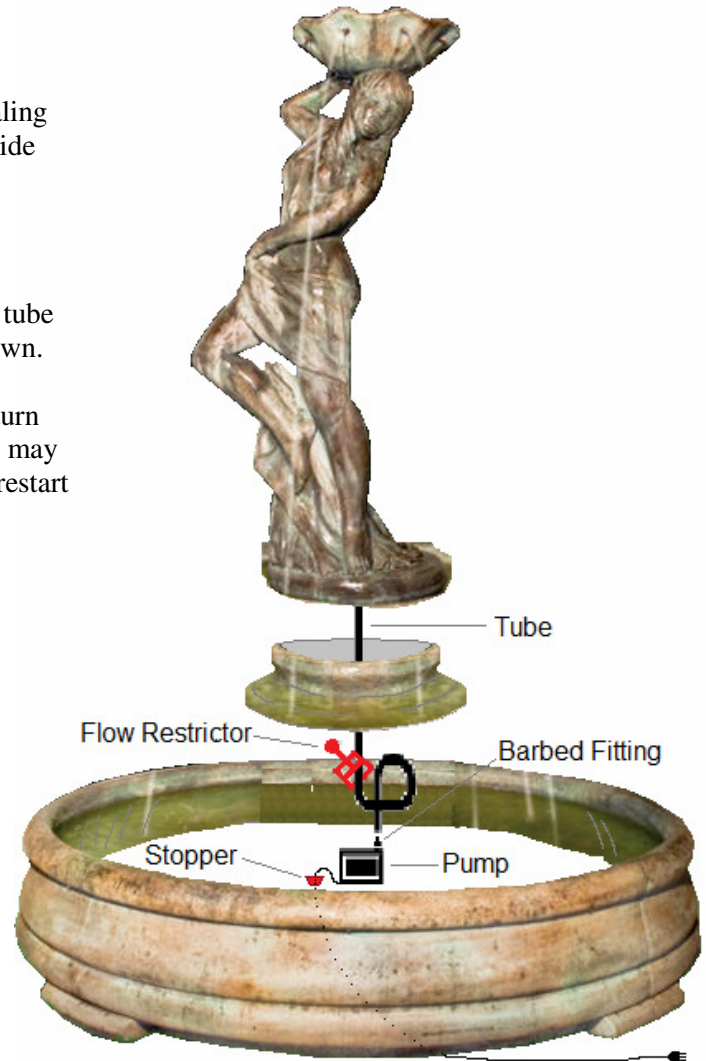

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Place an absorbant material like burlap, blankets, etc. inside vases/bowls and cover all with a Henri fountain cover.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

4/19

Online Resources

Products: www.henristudio.com/products
FAQs: www.henristudio.com/faq
Warranty: www.henristudio.com/warranty
Contact : www.henristudio.com/contact-us

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.