

5768FSETTING UP THE 5768F7, 5768FS or 5768F12

1) Prepare a suitable setting for your Classical Finial Fountain. This is a tall, vertical sculpture and care should be taken to ensure a stable, level surface before assembly is started as a slight angle will be noticeable and can affect the fountain's water action.

2) If you have the 5768F7, place your 6289 Pool on the setting. If you have the 5768F12, place just the 6504 Fiberglass Pool on the setting for now. (Surrounds can be added later.) (For the 5768FS, you supply your own bottom basin or pool.)

3) Set your pump in the middle of the pool and run the power cord down and out the center hole. Pull the cord out from underneath toward your power supply. Select the rubber stopper with the small hole, open its slit, place around the power cord (near the pump), and push into the hole, leaving about 1/8" above the surface.

4) Thread the 3/4" MPT x 3/4" Barb Adapter into the top of the pump. Attach the long tube to the barb. Then set the 7772 Pump Cover and the 7771 Base over the pump. (The 5768FS does not include the 7772 Pump Cover.)

5) Lengths of caulking tape are provided to help you secure the bowls and level them. Lay a ring of caulking tape around the top of the 7771 base. With help, set the 6770S Bowl on the 7771, pushing the tube up through the middle hole as you do, and check it for level using a carpenter's level if available. Open the slit in the larger stopper and place it around the tube, near the hole in the bowl. Press it tightly into the hole.

6) As the drawing at right shows, push an end leg of the tee into the long tube. Push a 4" x 3/4" tube over the tee's middle leg and push an 8" x 3/4" tube over the other leg. Place the Flow Restrictor on the shortest tube, screwing it closed just enough to hold in place. This can be tightened later if you want to push more water to the top of the fountain.


7) Set the 7768 Pedestal onto the middle of the 6770S bowl.

Again, line the top of the 7768 pedestal with caulk tape. Thread the two 1" Male Thread x 3/4" Barb adapters into the middle of the 6767S Bowl, top and bottom. Place the 6767S bowl on the 7768 pedestal, attaching the 8" tube from below to the bottom adapter's barb.

8) Attach the remaining 3/4" x 4" tube to the top barbed adapter in the 6767S bowl. Push the threaded end of the 1/2" MPT x 1/2" Barb Adapter into the top of the 3/4" x 4" tube. Then push the 1/2" x 4" tube over the adapter's barb. Lay caulk tape on the mount in the middle of the 6767S bowl and lower the 6768 Pedestal Bowl over the tube assembly, attaching the top tube to the metal connector inside the pedestal.

9) Attach the 1/2" x 8" tube to the top metal connector in the 6768 bowl and slip the 5768 Finial down over this tube.

10) Position the four 9024 Surrounds around the fiberglass pool now if you have the 5768F12 and install any access opening doors. Fill all bowls with water. Read your pump instructions. Connect the pump to a GFCI protected power supply. Adjust the level of bowls with the shims provided. Adjust or reduce the water flow if you wish by tightening the restrictor clamp. Then, make sure to follow the instructions below for winter care to preserve many years of enjoyment of this fountain.

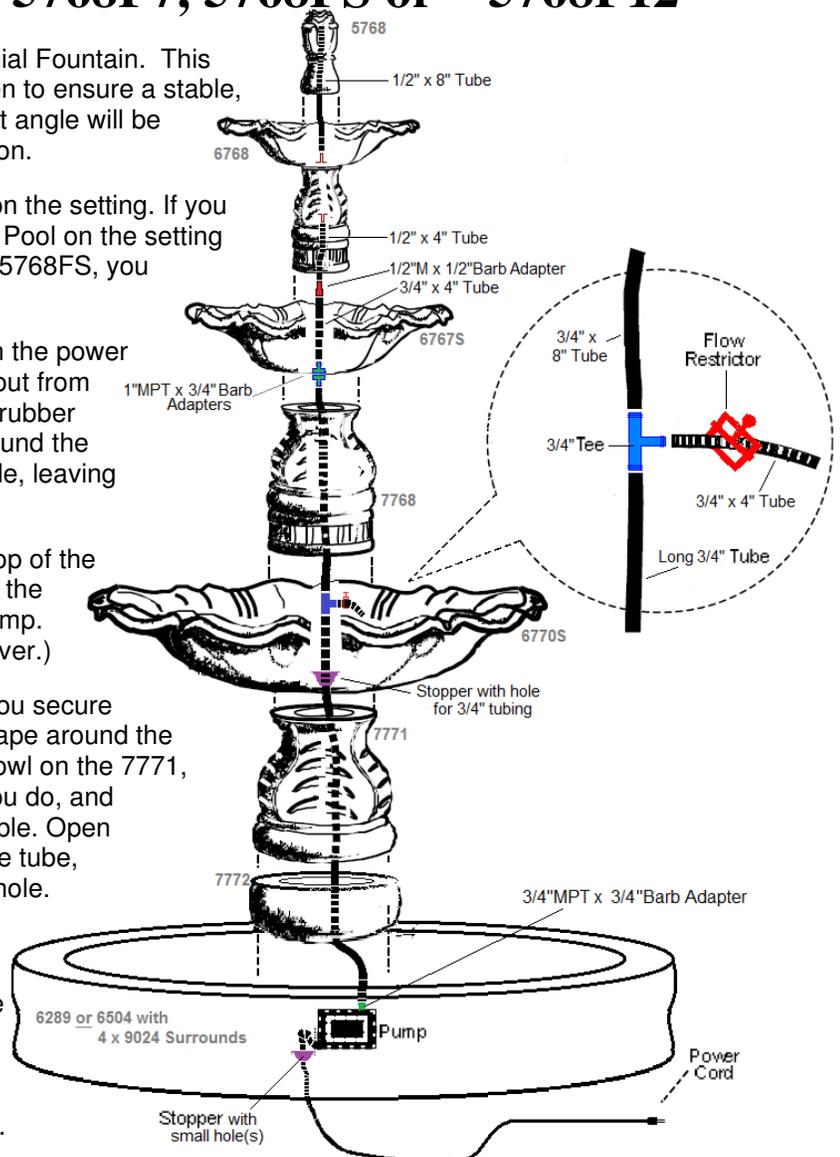

IMPORTANT – WINTER CARE

Winter ice can damage concrete:

* Disconnect power to pumps and lights.

* Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.

* Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.

* Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.