



# SETTING UP THE 5887F3

Make sure to place your fountain on a firm area which will not settle. Use plenty of help from others with these heavy pieces. Note: Always follow local electrical codes and use a 110V GFCI protected outlet.

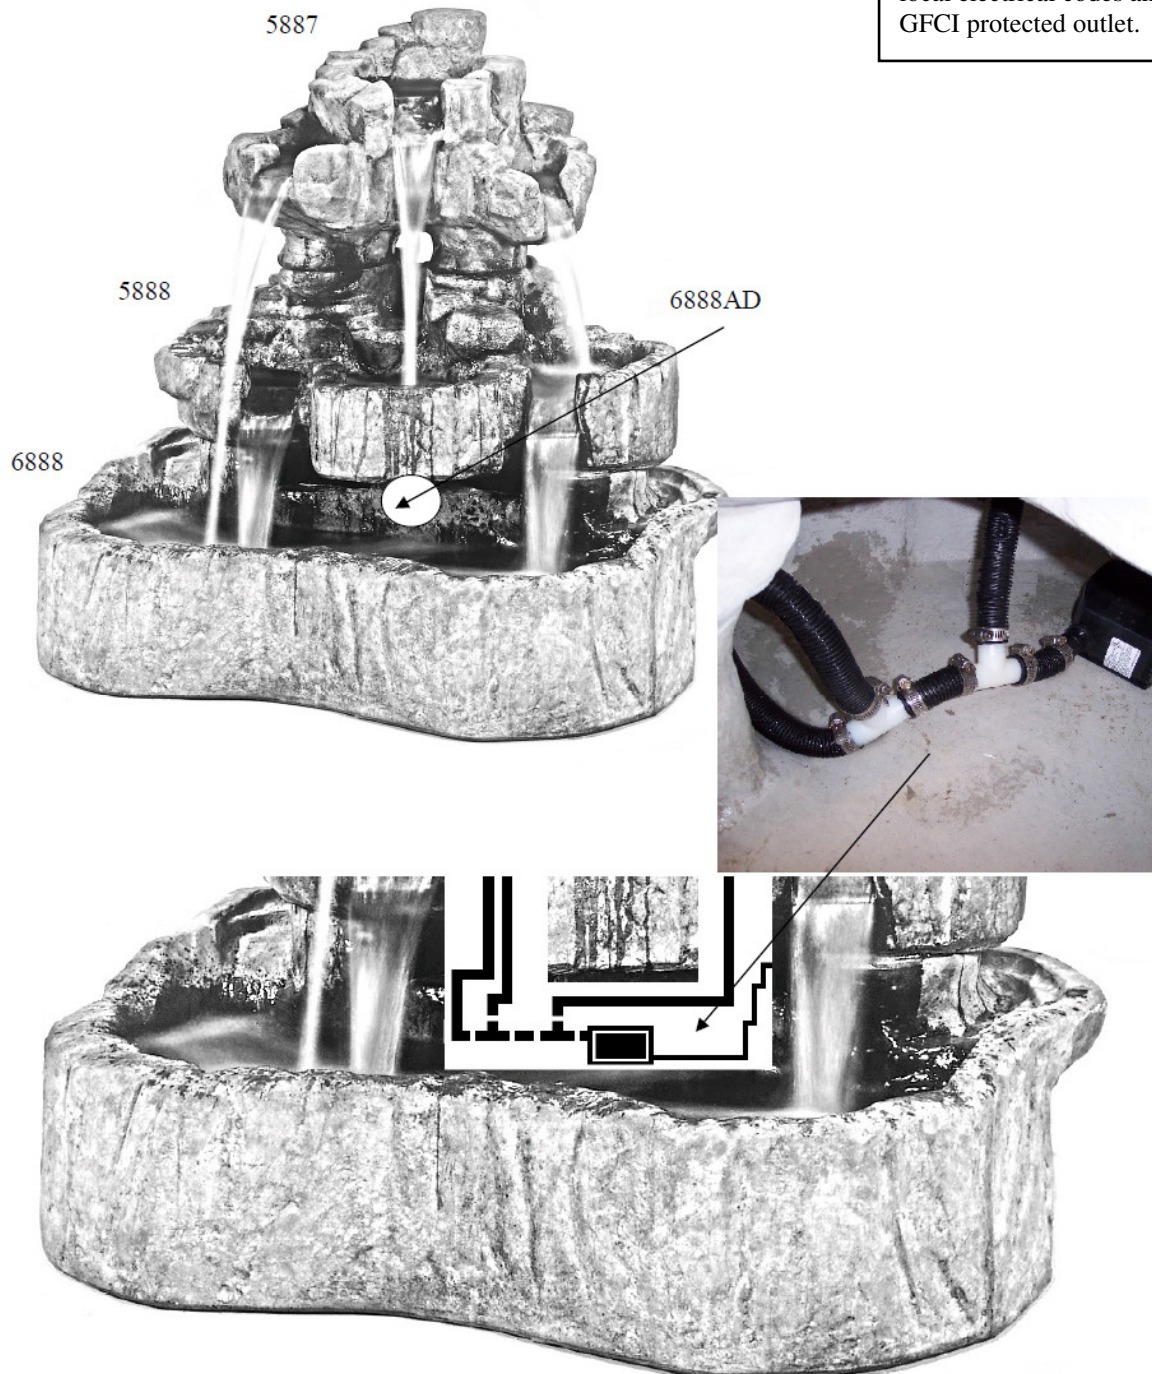

Pump sits on its side, behind the 6888AD (Access Door). Power cord out the back. Attach tees and tube segments as drawn, using clamps where shown in the photos.

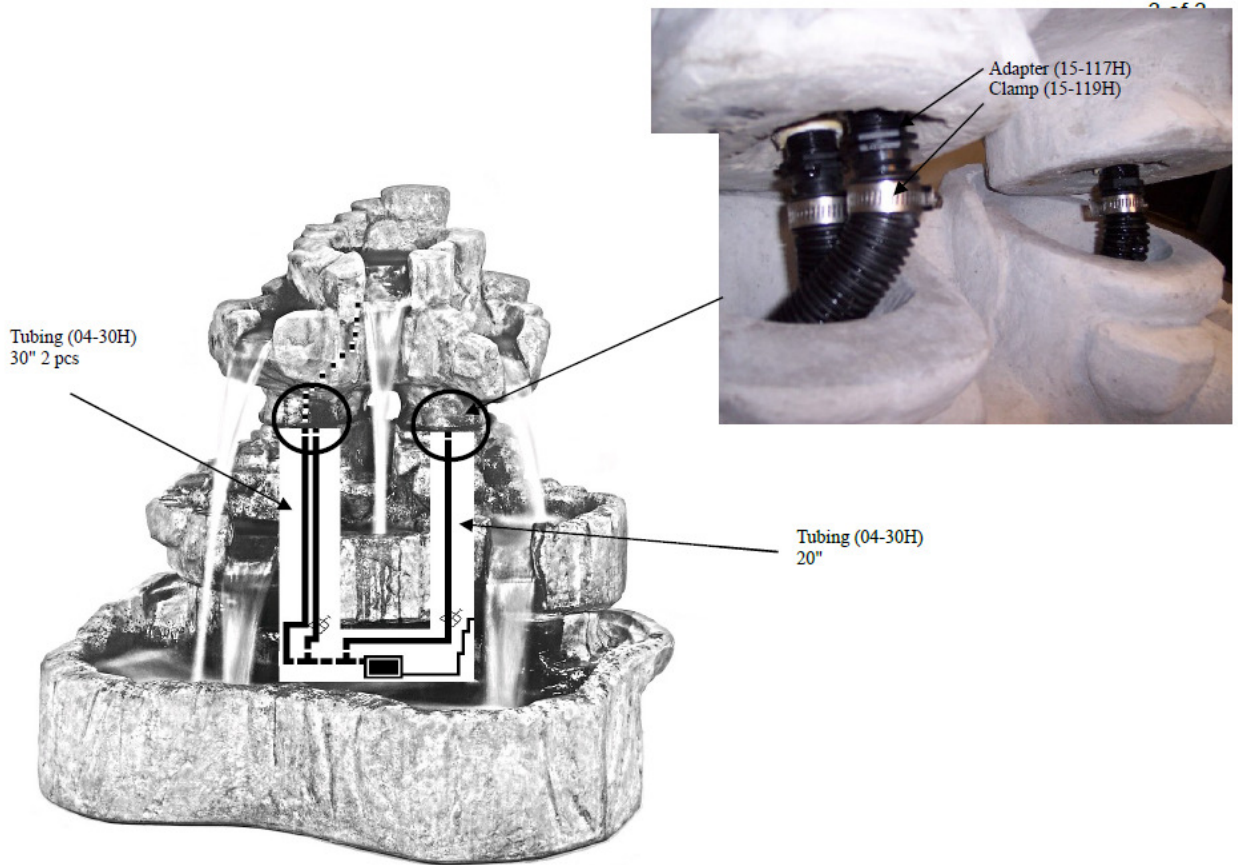

**Online Resources**

Products: [www.henristudio.com/products](http://www.henristudio.com/products)  
 FAQs: [www.henristudio.com/faq](http://www.henristudio.com/faq)  
 Warranty: [www.henristudio.com/warranty](http://www.henristudio.com/warranty)  
 Contact : [www.henristudio.com/contact-us](http://www.henristudio.com/contact-us)

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

**IMPORTANT – WINTER CARE**

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- \* Disconnect power to pumps and lights.
- \* Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- \* Place an absorbant material like burlap, blankets, etc. inside vases/bowls and cover all with a Henri fountain cover.
- \* Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.