


Kona Fountain (5992F1)

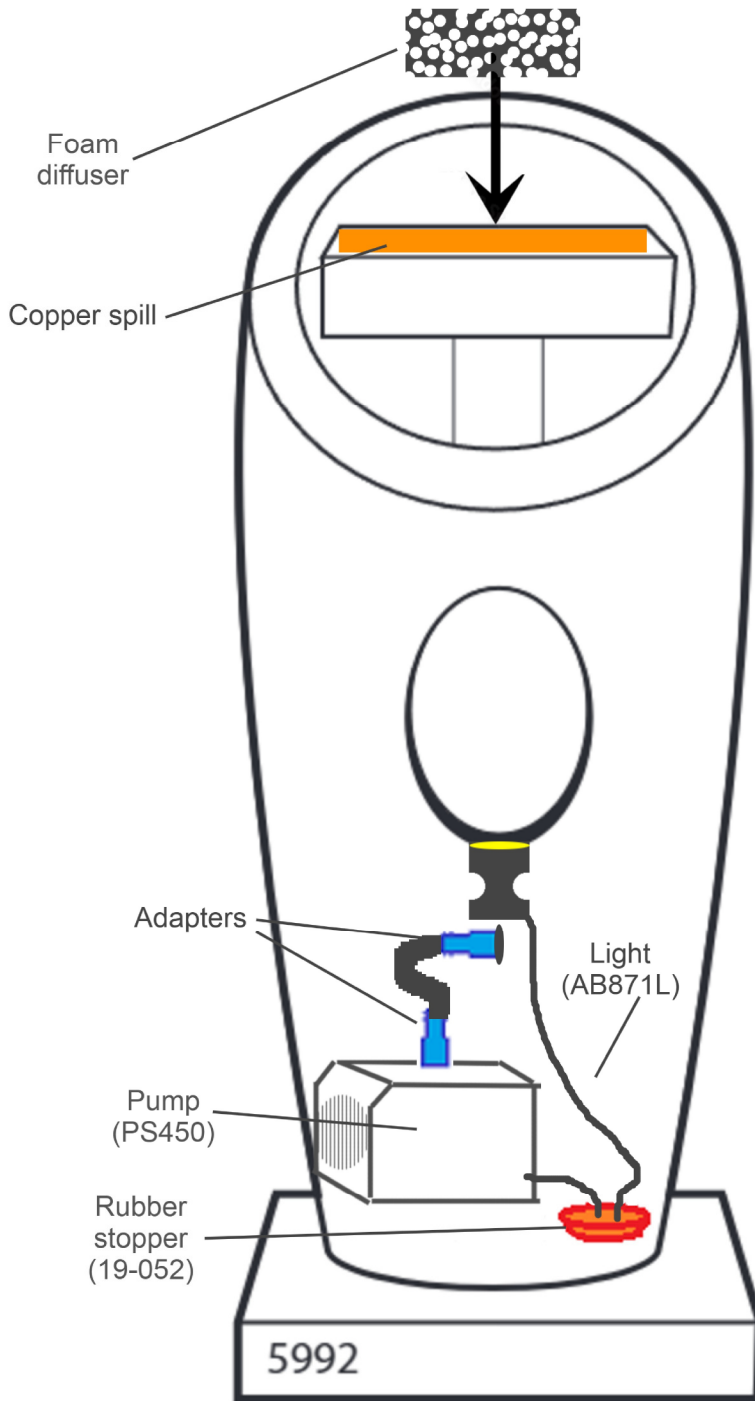

1) Place pump and light units into the basin, and run their respective power cables through the hole in the bottom of the basin, bringing the cables out and underneath the fountain.

2) Screw the installed adapters into the top of the pump and the threaded hole on the concrete basin, respectively. Press the included tubing onto the adapter on top of the pump. Press the other end of the tubing onto the adapter affixed to the concrete.

3) In the basin, peel the rubber stopper open and wrap it around the pump and light cables passing through the hole in the basin. Each cable has a respective channel in the stopper for their respective sizes. Ensure each cable is seated well within its channel, straight up and down with no gaps in the stopper. Press the stopper into place within the hole, so that no more than 1/4" of the stopper is left protruding above the concrete.

4) Install the copper spill plate. Apply a single, continuous bead of silicone across the entire length of the area in which the copper will be placed. Press the copper into place on the silicone bead, being careful to wipe away excess silicone that gets pressed out of the gap. Copper should overhang the concrete by about 1/4".

5) Press the foam diffuser sponge into place on top in the cavity where the water comes out.

6) Apply silicone to the top of the concrete "shelf" inside the basin. Press the light into the applied silicone to adhere it in place atop the shelf.

Questions? Email
ProductSupport@HenriStudio.com

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.