


Cascading Lilies 5993F1

1. Place the pump and light into the basin. Feed the power cables for the pump and the light out through the hole in the bottom of the fountain. Peel open the rubber stopper and place the pump and light cables within their respective channels. Press the stopper firmly into place within the hole to create a seal.

2. Install the included barbed adapters, screwing one onto the top of the pump and the other into the vertical concrete wall. Press each end of the tubing onto each adapter.

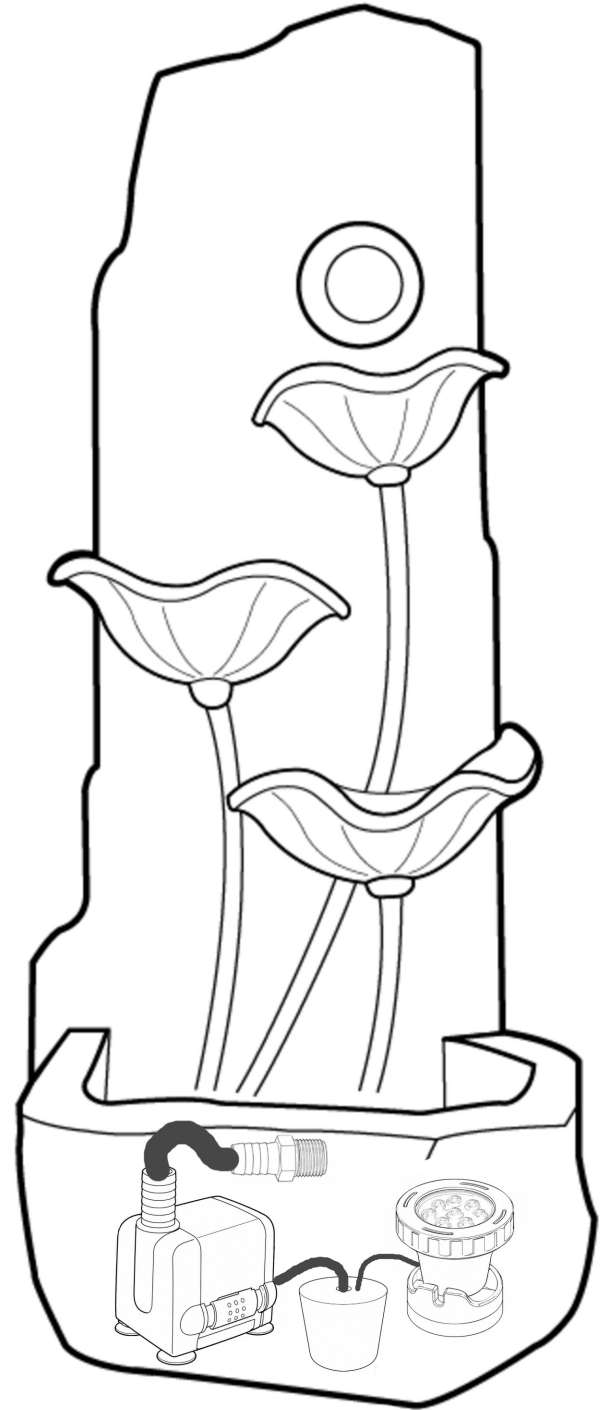

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Questions? Email
ProductSupport@HenriStudio.com

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.