


Delphi Fountain (4475F2)

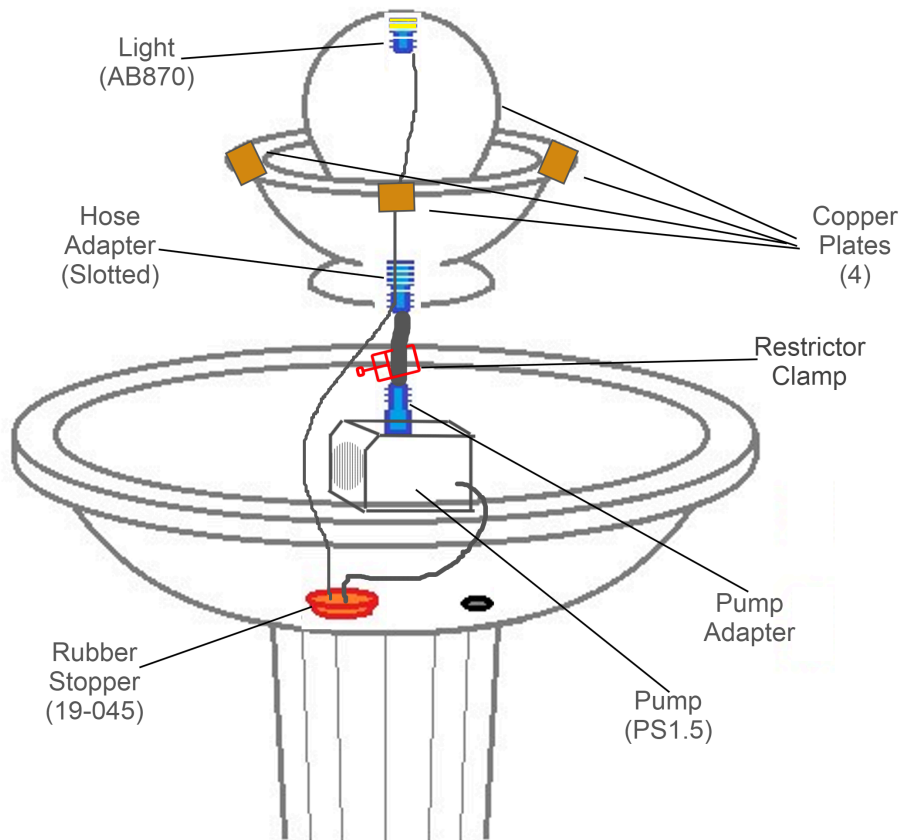

- 1) Install light in the ball piece. Run the light cable down into the basin, through the hole in the bottom of the basin, and outside the fountain.
- 2) Place the pump in the basin. Run the cable through the hole in the bottom of the basin, and outside the fountain.
- 3) Install the rubber stopper in the hole in the bottom of the basin, peeling it apart to place around the light and pump wires. Push down far enough that no more than 1/4" of the stopper is protruding above the concrete.
- 4) Install the hose adapter in the bottom of the top piece. Ensure that the light cable is through the slot cut into the adapter.
- 5) Install the plumbing exactly as outlined in the diagram. Be sure to place the restrictor clamp over the tubing before pressing the tubing onto the adaptors.
- 6) Install the copper plates in their respective areas with the included silicone. Use a single, continuous bead of silicone under each copper plate. Ensure the copper plates protrude over the edge of the concrete by no less than 1/4".

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

Make sure to place your fountain on a firm and level surface which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet. Do not let children climb on fountain.

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.

Questions? Email ProductSupport@HenriStudio.com