


## SETTING UP THE 5624F

Make sure to place your fountain on a firm area which will not settle. Note: Always follow local electrical codes and use a 110V GFCI protected outlet.

1. Locate a suitable site for your fountain. It should be firm and level, as well as provide a pleasing viewing angle. (You should always follow local electrical codes.)
2. Place pump in the center of the basin and run the power cord down through the basin's hole, pulling out from underneath toward your power supply. Open slit in Rubber Stopper, place around power cord near basin's hole, close and press stopper tightly into hole. Insert barbed adapters - smaller threads into top of pump and larger threads into the bottom of the 5624 vase.
3. Attach tubing firmly onto the barb under the vase. Then place the vase near the pump in the pool and firmly attach the other end of the tube to the pump.
4. Adjust the position of the vase to center it and hide the pump underneath.
5. After filling the fountain with water, turn on the pump and check the level of the top of the vase. If necessary, use shims to make the top of the vase exactly level – which provides the best balanced flow.
6. Henri Studio suggests you run the fountain just as described in order to enjoy a calming, shimmering effect. However, if your taste desires even more visible water action, a bendable nozzle is included which can be screwed into the floor of the vase to bring stronger water current to the surface.

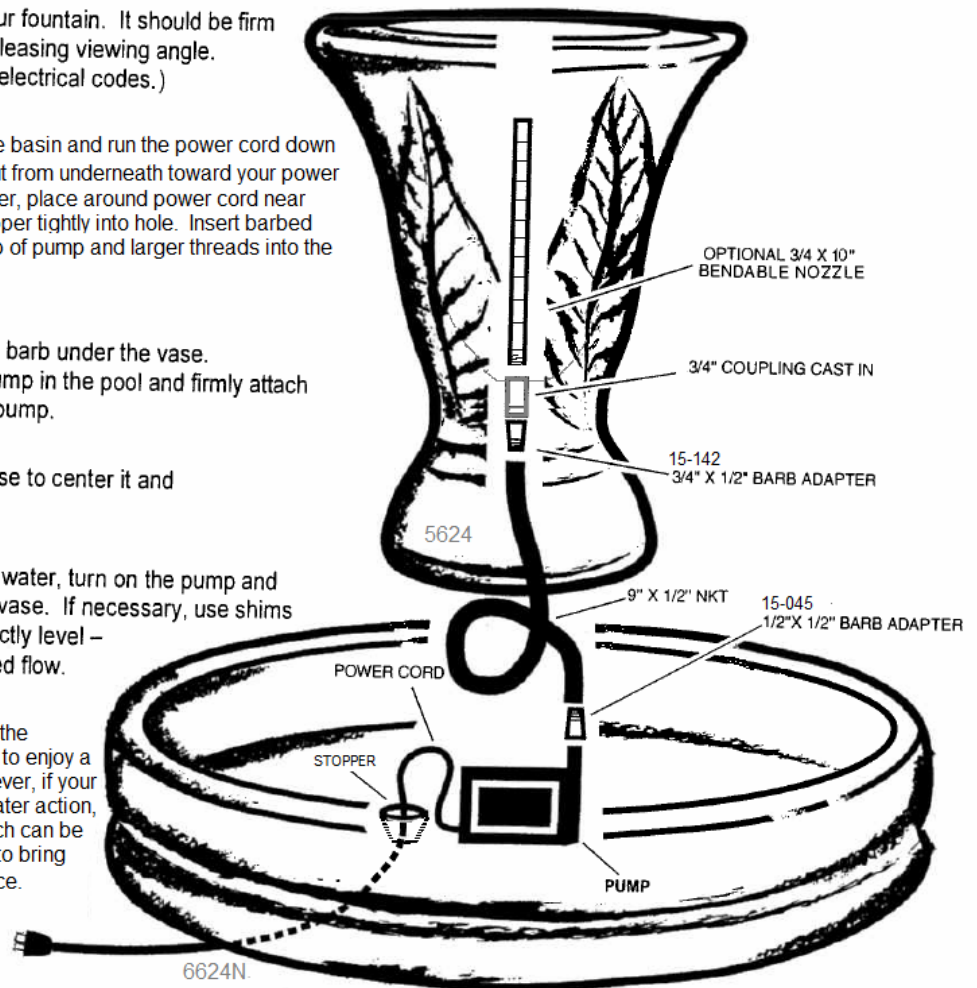

csd 8/2019

### Online Resources

Products: [www.henristudio.com/products](http://www.henristudio.com/products)  
FAQs: [www.henristudio.com/faq](http://www.henristudio.com/faq)  
Warranty: [www.henristudio.com/warranty](http://www.henristudio.com/warranty)  
Contact: [www.henristudio.com/contact-us](http://www.henristudio.com/contact-us)

Caution: The use of Chlorine or Chlorine Bleach or water coloring additives may damage the finish of your fountain.

### IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- \* Disconnect power to pumps and lights.
- \* Remove plugs/stoppers in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- \* Cover with a Henri fountain cover. Keep tight and do not let snow or water collect in sagging areas.
- \* Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use antifreeze, salt or chemical ice removers as these may damage concrete.